

TRUCK / CV SPECIAL 2024



Das Werkzeug



Valid from 1 March 2024 until 28 February 2025.
Errors excepted.

... whether truck, trailer, bus or machinery for construction and agriculture!

We are commercial vehicles!

Configure your trolley the way you want it!

Our perfect organisation system for your tool trolley.

All your tools are snugly embedded in high-quality 2-component soft foam inserts.

Endless combination options mean you can arrange your trolley according to your needs.


You can find more inserts at: www.hazet.de



166C, EAN-No. 4000896072286

Tool trolley *Assistent*

- With pillars that can swing down to a minimum height (647 mm) to save space for transport
- Dimensions (H x W x D): 1,102 x 725 x 398 mm
- Weight: 27.6 kg



Made in Germany



You can find suitable soft foam inserts here →

179NX

Tool trolley *Assistent*

- Can be filled with 1/3, 1/3+, 2/3, 2/3+, 3/3, 3/3+ soft foam inserts
- Dimensions (H x W x D): 1,020 x 786 x 518 mm

Made in Germany

HAZET No.	Number of drawers	EAN-No. 4000896+	
179NX-6	6	215560	
179NX-7	7	215577	
179NX-8	8	215584	



You can find suitable soft foam inserts here →

179NXL

Tool trolley *Assistent*

- Can be filled with 1/3, 1/3+, 2/3, 2/3+, 3/3, 3/3+, 4/3+ soft foam inserts
- Dimensions (H x W x D): 1,020 x 959 x 518 mm

Made in Germany

HAZET No.	Number of drawers	EAN-No. 4000896+	
179NXL-6	6	215171	
179NXL-7	7	215164	
179NXL-8	8	215218	



You can find suitable soft foam inserts here →

179NXXL

Tool trolley *Assistent*

- Can be filled with 1/3, 1/3+, 2/3, 2/3+, 3/3, 3/3+, 5/3+ soft foam inserts
- Dimensions (H x W x D): 1,020 x 1,133 x 518 mm

Made in Germany

HAZET No.	Number of drawers	EAN-No. 4000896+	
179NXXL-7	7	214624	
179NXXL-8	8	214778	



You can find suitable soft foam inserts here →

179NW

Work bench *Assistent*

- Can be filled with 1/3, 1/3+, 2/3, 2/3+, 3/3, 3/3+ soft foam inserts
- Dimensions (H x W x D): 964 x 1,150 x 600 mm

Made in Germany

HAZET No.	Equipment	EAN-No. 4000896+	
179NW-7	6 flat drawers, 1 high heavy-duty drawer and one storage compartment	219629	
179NW-8	8 flat drawers and one storage compartment	222933	

179NX-8/206, EAN-No. 4000896239375

Tool trolley *Assistant*
with 206 expert tools




Made in Germany

Tool trolley *Assistant* 179NX-8
Dimensions (H x W x D) 1,020 x 786 x 518 mm


206



Socket set 163-224/57
 s 12 1/2 1/4 1/8
HiPer
 Pliers set 163-511/4

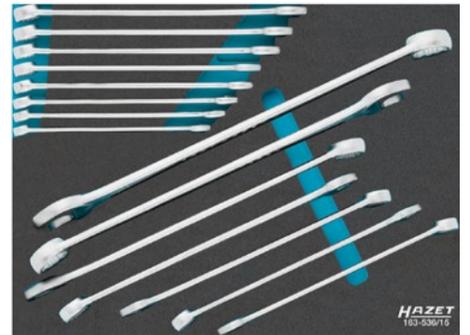

Combination wrench set 163-536/15
s 10–30 mm, long

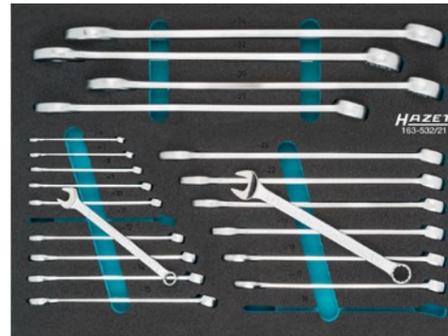

Combination wrench set 163-532/21
s 6–34 mm



Tool set 163-533/20
s 8–24 mm
 s 10–60 Nm, 40–200 Nm

7 filled drawers!



Impact adapter 1007S-7/4
With replaceable 1/2" adapter



Screwdriver set 163-297/26

 Circlip pliers set 163-531/4



Screwdriver socket set 163-534/37
 s 5–22 mm, short
 s 5–10 mm, long
 s 8–18 mm
 T 20–T 60



Tool set 163-535/18
 2–8 mm
 2–4 mm



178N-7/147, EAN-No. 4000896205080

Tool trolley *Assistant*
with 147 expert tools




Made in Germany

Tool trolley *Assistant* 178N-7
Dimensions (H x W x D) 1,037 x 781 x 498 mm

147



Tool set 163-466/106
 s 4–13 mm s 10–32 mm
HiPer

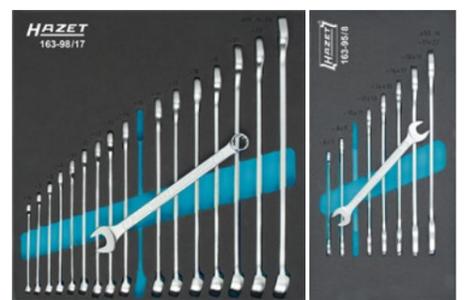

Combination wrench set 163-98/17
 s 6–24 mm
 Double open-end wrench set 163-95/8
s 6 x 7–21 x 22 mm



Tool set 163-330/16
 810-0.5 x 3.0–1.2 x 6.5 mm, 810 PH 1, PH 2
 810 T 10–T 30, 320 mm, 500 g

Including HiPer
1/4" and 1/2"
fine-tooth reversible ratchet!



Double precision in perfection!

- Developed and produced "Made in Germany"
- High permanent load for durability
- 90 teeth, 4° fine serration for confined spaces
- Locking function of the lever offers protection against unwanted switching
- A lot more performance with the same dimensions
- Strict production tolerances prevent dirt from getting in

HiPer
HIGH PERFORMANCE
THE ORIGINAL
MADE IN GERMANY



HiPer (HPS)

Fine-tooth reversible ratchet with safety locking

- Loosening-proof locking thanks to push button actuation
- Attached tools can easily be released by pressing the button with just one hand

6.3 1/4 10 3/8 12.5 1/2



Made in Germany

No.	HAZET No.	■	Nm	l mm	EAN-No. 4000896+
①	863HPS	6.3 1/4	100	116	237234
②	8816HPS	10 3/8	340	200	237241
③	916HPS	12.5 1/2	850	275	237258

HiPer
HIGH PERFORMANCE
THE ORIGINAL
MADE IN GERMANY




HiPer (HP)

Fine-tooth reversible ratchet

- A lot more power than ratchets with the same dimensions
- HAZET internal quality standards guarantee loading capacity far beyond the standard requirements

6.3 1/4 6.3 1/4 10 3/8 12.5 1/2

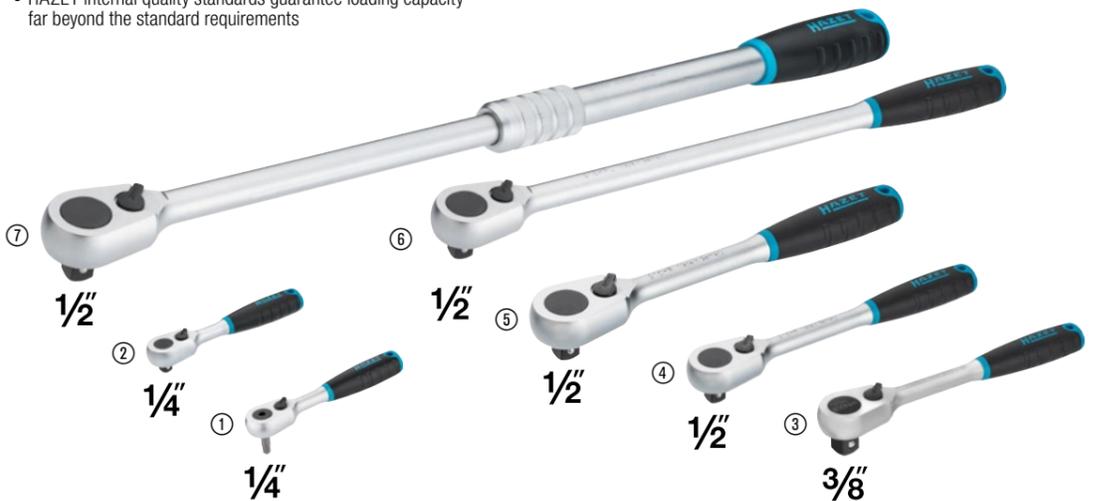

Made in Germany

No.	HAZET No.	■	Nm	l mm	EAN-No. 4000896+
①	863HPB	6.3 1/4	120	116	235346
②	863HP	6.3 1/4	120	116	226917
③	8816HP	10 3/8	400	200	235063
④	916HPK	12.5 1/2	400	200	244379
⑤	916HP	12.5 1/2	1,000	275	213894
⑥	916HPL	12.5 1/2	1,000	415	219209
⑦	916HPLG	12.5 1/2	1,000	414-614	233076

HiPer
HIGH PERFORMANCE
THE ORIGINAL
MADE IN GERMANY



1/2" ratchet with 3/8" length!

916HPK Length: 200 mm



916HP Length: 275 mm

600N/21, EAN-No. 4000896023356

Combination wrench set

- Surface: chrome-plated, head polished
- DIN 3113 form A, ISO 3318, ISO 7738
- s 6 · 7 · 8 · 9 · 10 · 11 · 12 · 13 · 14 · 15 · 16 · 17 · 18 · 19 · 21 · 22 · 24 · 27 · 30 · 32 · 34 mm
- Output: outside 12-point traction profile



Made in Germany

600LG

Combination wrench, extra long, slim design



600LG/13

Made in Germany

HAZET No.	■	S mm	EAN-No. 4000896+
600LG/10	10	10 · 11 · 12 · 13 · 14 · 15 · 16 · 17 · 18 · 19	218424
600LG/12	12	10 · 11 · 12 · 13 · 14 · 17 · 19 · 22 · 24 · 27 · 30 · 32	202492
600LG/13	13	10 · 11 · 12 · 13 · 14 · 15 · 16 · 17 · 18 · 19 · 21 · 22 · 24	218417



606 Ratcheting combination wrench set

- Ratchet function with one-hand reversing switch
- Fine tooth, 72 teeth, rotation angle 5°
- Box-end side 13° offset
- Surface: chrome-plated
- Output: outside 12-point traction profile



HAZET No.	□	S mm	EAN-No. 4000896+
606/5	5	8 · 10 · 13 · 17 · 19	177998
606/6-1	6	21 · 22 · 24 · 27 · 30 · 32	175178

610N Double box-end wrench set

- Suitable for wall fixation
- Plastic tool holder
- Surface: chrome-plated, head polished
- DIN 837 form B, ISO 10103
- Dimensions (L x W x H): 355 x 235 x 65 mm



Made in Germany

No.	HAZET No.	□	S mm	L x W x H mm	EAN-No. 4000896+
①	610N/8RS	8	6x7 · 8x9 · 10x11 · 12x13 · 14x15 · 16x17 · 18x19 · 21x22	260x110x55	025008
②	610N/12RS	12	6x7 · 8x9 · 10x11 · 12x13 · 14x15 · 16x17 · 18x19 · 20x22 · 21x23 · 24x26 · 25x28 · 27x32	340x165x75	024988

610N/12RS with carrying handle

811/6, EAN-No. 4000896258383

Screwdriver set · Slot/Phillips

- With hanging hole in handle
- Surface: blade matt chrome-plated, tip burnished

Contents:

- 0.5 x 3 · 0.8 x 4 · 1 x 5.5 · 1.2 x 6.5 mm
- PH1 · PH2



NEW!

811T/6, EAN-No. 4000896258406

Screwdriver set · TORX®

- With hanging hole in handle
- Surface: blade matt chrome-plated, tip burnished

Contents:

- T10 · T15 · T20 · T25 · T27 · T30



NEW!

811S/5, EAN-No. 4000896258420

Screwdriver set · Impact cap

- With hex bolster (for use with a wrench) and impact cap
- Surface: blade matt chrome-plated, tip burnished

Contents:

- 0.8 x 4.5 · 1 x 5.5 · 1.2 x 7 mm
- PH1 · PH2



Impact cap

NEW!

810R 1/4" ratcheting bit screwdriver with built-in magazine

- Ratchet with freewheel mechanism, reversible or use as a normal screwdriver
- Integrated bit magazine is easy to open by pressing a button while pulling
- Comfortable to hold and offers effective impact
- Length: 170 mm (closed, without extension)

Contents:

- Ratcheting bit screwdriver 810R-1
- 12 x screwdriver bits
- Extension (80 mm) 810R-2



No.	HAZET No.	Screwdriver bits	EAN-No. 4000896+
①	810R-3	0.5 x 4.0 · 1.2 x 6.5 mm	239658
		PH1 · PH2	
		PZ1 · PZ2	
		s 4 · 5 · 6 mm	
		T15 · T20 · T25	
②	810R-4	0.8 x 5.5 mm	239665
		PH2 · PH3	
		s 3 · 4 · 5 · 6 mm	
		T15 · T20 · T25 · T27 · T30	

Incl. extension (80 mm) 810 R-2!



Push button to open the magazine

HAZET SMART SERIES

Discover our Smart Series

- Concept idea: Maximum number of tools stored in the smallest possible space for the best possible overview
- Functionally designed tool storage with pleasant feel
- Tool supplement "To Go": should always be taken along when there is something to be screwed quickly



2200SC-32, EAN-No. 4000896244546

1/4" socket and screwdriver bit set

Contents

- 810BHK bit holder hexagon
- 863HPB HiPer fine tooth reversible ratchet for screwdriver bits
- 2239N-6 adapter
- 2239-1 adapter
- 2304N adapter
- 2100-0 offset screwdriver: s 1.5 · 2 · 2.5 · 3 · 4 · 5 · 6 mm
- 850 socket: s 5.5 · 6 · 7 · 8 · 10 · 11 · 12 · 13 mm



HAZET SMART CASE HiPer inside 59

Short screwdriver bits Length: 25 mm

⊖	0.4 x 1.5 mm
+	PH1 · PH2 · PH3
+	PZ1 · PZ2
○	4 · 5 · 6 mm
⊕	T10 · T15 · T20 · T25 · T30 · T40

Long screwdriver bits Length: 50 mm

⊖	0.8 x 5.5 mm
+	PH2
+	PZ2
○	3 · 4 mm
⊕	T20 · T25 · T30

Extra long bits Length: 89 mm

⊖	0.8 x 5.5 mm
+	PH1 · PH2
+	PZ1 · PZ2
○	3 · 4 · 5 · 6 mm
⊕	T20 · T25 · T30



863HPB HiPer fine-tooth reversible ratchet



810BHK bit holder hexagon



Assortment

2300SH-1, EAN-No. 4000896246588

SmartHolder

Contents

- 863MB Mini solid steel fine-tooth reversible ratchet
- 810BMK bit holder
- 850 socket: s 5.5 · 7 · 8 · 10 · 12 · 13 mm
- 18 screwdriver bits, short 25 mm
- 11 screwdriver bits long, 50 mm
- 2239N-6 adapter
- 2304N adapter



HAZET SMART HOLDER red dot winner 2023 39

Short screwdriver bits Length: 25 mm

⊖	0.6 x 4.5 mm
+	PH1 · PH2 · PH3
+	PZ1 · PZ2 · PZ3
○	3 · 4 · 5 · 6 · 8 mm
⊕	T10 · T15 · T20 · T25 · T30 · T40

Long screwdriver bits Length: 50 mm

⊖	0.8 x 5.5 mm
+	PH2
+	PZ1 · PZ2
○	3 · 4 · 5 · 6 mm
⊕	T20 · T25 · T30



863MB mini solid steel fine-tooth reversible ratchet



810BHK bit holder hexagon



850SR-7, EAN-No. 4000896249626

1/4" SmartRail with 7 slots, empty

- Dimensions: 245 x 37.4 x 29.2 mm



Made in Germany

900SR · 992T-SR

1/2" SmartRail with slots for sockets

- Magnetic underside ensures grip on all ferrous surfaces, e.g. on tool trolleys, tool walls, machines, lifting platforms and in metal drawers
- Flexible plastic connector strip with 1/2" square slots
- Easy to clean material and pleasant surface feel
- Durable, robust twist lock for a tight fit and instant access
- More securely fixed when locked, turn socket left to remove
- Incl. robust metal lug for hanging, e.g. on a hook



SmartRail with fitted slots

Made in Germany

SmartRail with empty slots


Made in Germany

No.	HAZET No.	Slots (empty)	L x W mm	EAN-No. 4000896+
①	900SR-5	5	245 x 37.4	244508
②	900SR-8	8	365 x 37.4	244515

No.	HAZET No.	Slots	Contents	L x W mm	EAN-No. 4000896+
③	900SLG-SR/5	5	Socket, long s 13 · 17 · 19 · 22 · 24 mm	245 x 37.4	245376
④	992T-SR/8	8	TORX®, short s T20 · T25 · T30 · T40 · T45 · T50 · T55 · T60	365 x 37.4	245277

The new compact grip pliers wrenches Series 762. Developed and produced by HAZET "Made in Germany"!


- Compact and at the same time highly resilient
- Convenient one-hand presetting possible
- The convenient grip pliers wrenches from HAZET are available in four different lengths of 125, 150, 180 and 260 mm



Square



Nail and wire holder function

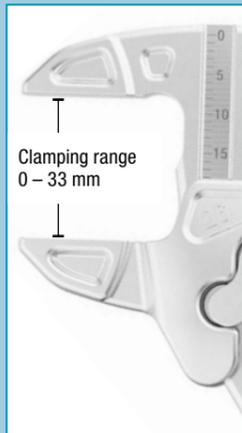

Clamping range 0 – 33 mm



6-point



Flat material



Clamping range lasered



One-hand operation with tip/step lever function



Production



Product video

762

Grip pliers wrenches

- In four different lengths: 125, 150, 180 and 260 mm
- Convenient – thanks to quick adjustment with proven HAZET tip/step lever function
- Permanent laser-marked scaling for easy setting and reading
- High corrosion resistance due to chrome-plated, easy-to-clean pliers legs
- Heavy-duty pliers legs made of case-hardened chrome vanadium steel
- Pleasant to grip thanks to double dip coating – lies well in the hand!
- Fine detent enables any wrench size in the clamping range

NEW!



Made in Germany

HAZET No.	l mm	Detent distance mm	Detent positions Number	Clamping range mm	EAN-No. 4000896 +
762-12	125	2.0	12	26	249800
762-15	150	2.0	15	33	249640
762-18	180	2.0	19	42	249787
762-26	260	2.5	20	56	249664

762

Protective jaws for 762-18, 762-26

- Contents: 3 pairs

Made in Germany

HAZET No.	Designation	EAN-No. 4000896 +
762-018/6	Protective jaws for 762-18	259861
762-026/6	Protective jaws for 762-26	259885



The new universal pliers/water pump pliers Series 760. Developed and produced by HAZET "Made in Germany"!


- Compact and at the same time highly resilient
- More force thanks to teeth offset against the direction of rotation
- The convenient universal pliers from HAZET are available in four different lengths with 125, 150, 180 and 260 mm



Square



Nail and wire holder function

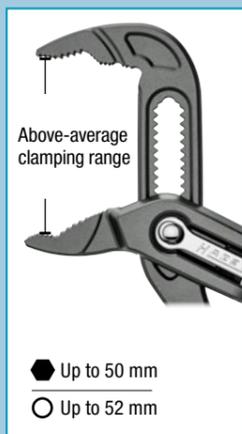

Above-average clamping range



6-point



Flat material



Pipe



One-hand operation with tip/step lever function



Production



Product video

760

Universal pliers/Water pump pliers

- Long service life due to extremely hard jaw serration with additional inductive hardening
- In four different lengths: 125, 150, 180 and 260 mm
- Precise detent distance with the aid of laser-cut serration
- Ergonomic - sits comfortably in the hand thanks to double dip coating
- Convenient – thanks to quick adjustment with proven HAZET tip/step lever function
- Heavy-duty pliers legs made of case-hardened chrome vanadium steel
- Fine detent enables any wrench size in the clamping range
- Phosphatized surface

NEW!



Made in Germany

HAZET No.	l mm	Detent distance mm	Detent positions Number	Clamping range mm	Clamping range mm	EAN-No. 4000896 +
760-12	125	2.0	13	27	32	249749
760-15	150	2.0	14	34	38	249688
760-18	180	2.0	17	36	42	249763
760-26	260	2.5	17	50	52	249701

SYSTEM 5000-3CT torque wrench – our classic workshop tool!

- Large measuring range: 1 – 800 Nm
- 10 versions incl. 1/4", 3/8", 1/2", 3/4" reversible ratchet with square drive for commercial vehicle applications
- Accuracy: $\pm 3\%$ of scale value (5107-3CT: $\pm 4\%$)
- Tested according to DIN EN ISO 6789-2:2017 with calibration certificate and serial number
- HAZET's own Service Centre for best aftersales service
- Developed and produced by HAZET "Made in Germany"




SYSTEM 5000-3CT

- Adjustment aid with detent points for optimised operator guidance ensures safe and fast adjustment of the desired torque value by turning the handle
- Trigonometric shape of the blue rotary assembly prevents uncontrolled rolling away
- Accuracy $\pm 3\%$ of the scale value (in direction of actuation for right-hand tightening) / 5107-3 CT $\pm 4\%$ accuracy of scale value
- Integrated shift lever with free-running function for the measuring ranges 20 – 320 Nm reduces the risk of injury and malfunction (5121-3CT, 5122-3CT, 5123-3CT)
- Outside square according to DIN 3120, ISO 1174-1

 Made in Germany

No.	HAZET No.		Torque range Nm	Release accuracy tolerance %	Graduation Nm	l mm	EAN-No. 4000896+
①	5107-3CT		1–9	4	0.1	234	218875
②	5108-3CT		2.5–25	3	0.25	234	218882
③	5110-3CT		10–60	3	0.5	320	218899
④	5111-3CT		20–120	3	1	375	235384
⑤	5120-3CT		10–60	3	0.5	320	218905
⑥	5121-3CT		20–120	3	1	421	218912
⑦	5122-3CT		40–200	3	1	519	219001
⑧	5123-3CT		60–320	3	2	628	218998
⑨	5143-3CT		100–400	3	2.5	790	235407

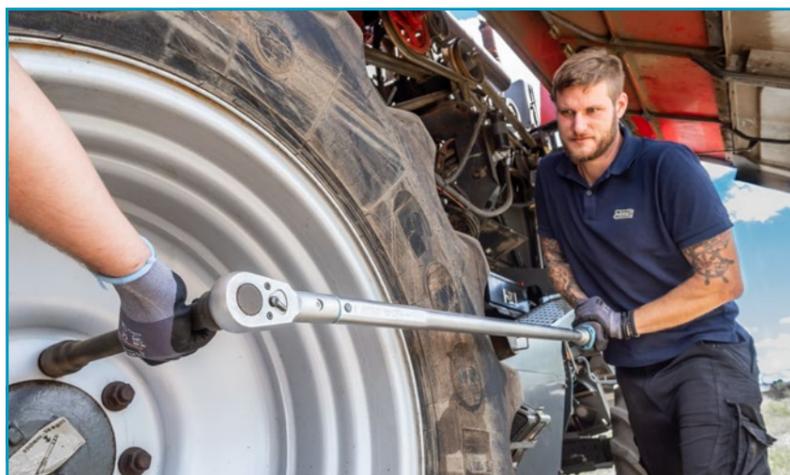

5145-3CT, EAN-No. 4000896218929



3/4" torque wrench 300–800 Nm, $\pm 3\%$

- No more turning back!
- Release accuracy tolerance (in direction of actuation): $\pm 3\%$ of scale value
- Length (total): 1,271 mm
- Graduation: 2.5 Nm

Top seller for commercial vehicles!



6000-1CT

3/4" or 1" torque wrench 400–1,600 Nm, $\pm 3\%$

- Release accuracy tolerance (in direction of actuation): $\pm 3\%$ of scale value
- Incl. bag for safe storage
- 2-component handle
- Viewing window for locking



 Made in Germany

No.	HAZET No.		Torque range Nm	Release accuracy tolerance %	Graduation Nm	l mm		EAN-No. 4000896+
①	6150-1CT		400–1,000	3	5	1,789	24.2–61.0	141067
②	6160-1CT		600–1,600	3	5	2,455	26.1–70.1	155316

Twin Turbo

- The strongest HAZET impact wrench series ever!
- Twin Effect – More power in less time!
- Two air inlets and four air outlets
- 8-blade air motor with 25% higher impact performance ensures maximum torque

9012TT, EAN-No. 4000896226924

125 1/2

1/2" Twin Turbo impact wrench

- Loosening torque (max.): 2,200 Nm
- Recommended torque: 948 Nm
- Sound power level (at working pressure): 110.7 db(A) Lp W
- Sound pressure level (at working pressure): 99.7 dB(A) Lp A
- Vibration acceleration: 8.69 m/s²
- Revolutions per minute: 8,300
- Air requirement: 147.2 l/min
- Loosening torque (max) determined with screw size M16
- Weight: 1.6 kg

1/2"



Short: only 128 mm



9012ATT, EAN-No. 4000896234738

125 1/2

1/2" Twin Turbo rotatable impact wrench

- Loosening torque (max.): 550 Nm
- Recommended torque: 450 Nm
- Sound power level (at working pressure): 101.1 db(A) Lp W
- Sound pressure level (at working pressure): 90.1 dB(A) Lp A
- Vibration acceleration: 4.89 m/s²
- Revolutions per minute: 8,000
- Air requirement: 113 l/min
- Loosening torque (max) determined with screw size M: 16
- Weight: 1.3 kg

1/2"



Short, compact, angled design – only 70 mm!



9012PTT, EAN-No. 4000896252732

125 1/2

1/2" Twin Turbo palm impact wrench

- Loosening torque (max.): 550 Nm
- Recommended torque: 450 Nm
- Sound power level (at working pressure): 103.9 db(A) Lp W
- Sound pressure level (at working pressure): 92.9 dB(A) Lp A
- Vibration acceleration: 7.64 m/s²
- Revolutions per minute: 8,000
- Air requirement: 113 l/min
- Loosening torque (max) determined with screw size M16
- Weight: 1.1 kg

1/2"



Comparison with 9012ATT



Extremely compact – only 70 mm!



9013MTT, EAN-No. 4000896258062

20 3/4

3/4" Twin Turbo impact wrench

- Loosening torque (max.): 1,890 Nm
- Housing length: 128 mm
- Recommended torque: 900 Nm
- Sound power level (at working pressure): 110.3 db(A) Lp W
- Sound pressure level (at working pressure): 99.3 dB(A) Lp A
- Vibration acceleration: 11.39 m/s²
- Revolutions per minute: 8,000
- Air requirement: 150 l/min
- Loosening torque (max) determined with screw size M26
- Weight: 1.7 kg

3/4"



9013MTT compared with 9013TT

3/4" impact wrench in 1/2" housing size



9013TT · 9014TT · 9013LGTT · 9014LGTT

3/4" or 1" Twin Turbo impact wrench

- Exhaust air is guided downwards through the handle
- Long service life
- One-hand operation for left- and right-handed users
- Removable handle, 360° adjustable
- Reduced vibrations
- Loosening torque (max) determined with screw size M32

20 3/4 25 1"

① 3/4"



② 1"



③ 3/4"



④ 1"




No.	HAZET No.	■	Special feature	Max. Nm	rpm	kg	🔌	EAN-No. 4000896 +
①	9013TT	20 3/4	Extra short: 184 mm	4,100	5,200	4.5	3/8" (16.41 mm)	7.2 227143
②	9014TT	25 1"	Strong and handy: 4.6 kg	4,100	5,200	4.6	1/2" (20.67 mm)	10 234684
③	9013LGTT	20 3/4	Long spindle: 186 mm	3,800	5,200	5.5	3/8" (16.41 mm)	7.2 232277
④	9014LGTT	25 1"	Long spindle: 240 mm	3,850	4,600	5.9	1/2" (20.67 mm)	10 234677

9014PS-1 · 9014P-1

1" impact wrench

- Loosening torque (max.): 3,400 Nm
- Output designed with hole for pinning, as well as a nut-driver holder ring
- One-hand reversing switch
- Reduced vibrations
- Coupler plug (incl.): 10 nominal size
- Forward/reverse: three stage
- Loosening torque (max.): 3,400 Nm
- Tightening torque (max.): 2,712 Nm
- Working pressure: 6.3 bar
- Rotation speed: 5,500 rpm
- Air requirement 283 l/min (4.7 l/sec)
- Sound pressure level (at working pressure): 103.5 dB(A) Lp A
- Air inlet: inside thread 1/2" (20.67 mm)

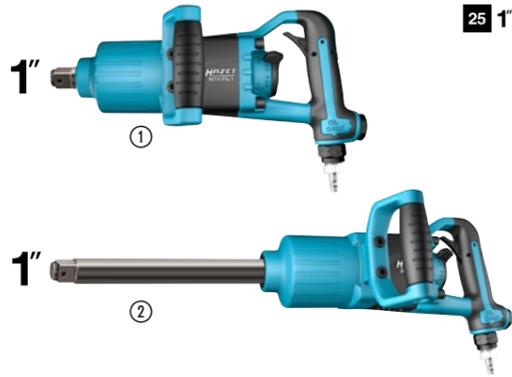

No.	HAZET No.	Designation	EAN-No. 4000896+
①	9014PS-1	1" impact wrench · short 382 mm	222490
②	9014P-1	1" impact wrench · long spindle 587 mm	218332

9011M, EAN-No. 4000896201570

3/8" impact wrench · extra short, only 92 mm

- Loosening torque (max.): 461 Nm
- Compact design for work in confined spaces – only 92 mm short
- Revolutions per minute: 6,500
- Air requirement: 85.2 l/min
- Sound pressure level (at working pressure): 90.3 dB(A) Lp A
- Vibration acceleration: 7.78 m/s²
- Weight: 1.2 kg



9022SR-1, EAN-No. 4000896170593

1/2" impact ratchet

- Suitable for manual retightening with torque values → 270 Nm (competitive product with approx. 250 Nm only)
- Low-impact
- Tightening torque (max.): 102 Nm
- Working pressure: 6.3 bar
- Length (total): 280 mm
- Weight (net): 1.28 kg
- Coupler plug (incl.): 7.2 nominal size



9035-5, EAN-No. 4000896132355

Needle scaler

- Adjustable needle cover
- Removes precise, small and large emerging patches of rust
- 19 needles (Ø 3 mm)
- 3,200 impacts/min
- Weight (net): 2.6 kg
- Air requirement: 170 l/min (2.8 l/sec)
- Total length: 321 mm
- Coupler plug (incl.): 7.2 nominal size



HAZET No.	Quantity	Designation	EAN-No. 4000896+
9035-5	1	Needle scaler	132355
9035-050	19	Spare needles for needle scaler 9035-5, Ø 3 mm, length 181 mm	139385

9033N-4, EAN-No. 4000896210183

Belt sander

- Continuous speed regulation via speed regulator on back of handle
- For narrow surfaces (belt width 10 mm)
- Including three abrasive belts 330 x 10 mm (grain size 80, 100, 120)
- Locking device for quick belt changing
- Automatic belt adjustment
- Length (total): 291.4 mm
- Weight (net): 0.81 kg
- Coupler plug (incl.): 7.2 nominal size
- Length (total): 291.4 mm



HAZET No.	Quantity	Designation	EAN-No. 4000896+
9033N-4	1	Belt sander	210183
9033-480/10	10	Abrasive belt set: Grain size 80	139101
9033-4100/10	10	Abrasive belt set: Grain size 100	139118
9033-4120/10	10	Abrasive belt set: Grain size 120	139125



360° rotatable belt run


9035M-6, EAN-No. 4000896258109

Mini needle scaler

- Gentle cleaning of soiled / rusted parts especially cleaning of brake systems etc.
- Extremely slim / short pin form and free needles allow you to reach difficult to access areas as well
- 13 thin stainless steel needles (Ø 1.3 mm)
- 3,000 impacts/min
- Length: 236 mm



With air outlet adjustable by 360°

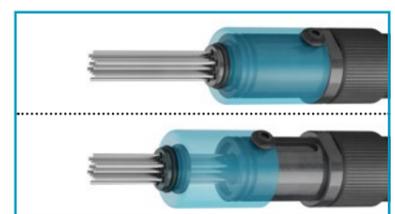

Adjustable needle carriage with integrated needle guide ensures long service life

HAZET No.	Quantity	Designation	EAN-No. 4000896+
9035M-6	1	Mini needle scaler	258109
9035M-050	13	Spare needles for mini needle scaler 9035 M-5, Ø 1.3 mm, length 81 mm	233205

9041G-1, EAN-No. 4000896212385

Tyre inflator · calibrated

- Manometer measuring range: 0–12 bar, graduation: 0.1 bar
- Pressure (max.): 12 bar
- Temperature range: -20 to +60 °C
- Scale values in bar
- Hose with plug-in nipple
- Measuring tolerance: -15 to 25 °C, 0 to 4 bar: ±0.08 bar, from 4 to 12 bar: ±0.16 bar
- Hose length: 1,000 mm
- Recalibration possible (not carried out by HAZET)



Ø 80 mm

9041D-1, EAN-No. 4000896212378

Tyre inflator · digital

- Manometer measuring range: 0–12 bar, graduation: 0.01 bar
- Pressure (max.): 12 bar
- Temperature range: -20 to +50 °C
- Display toggles between bar/PSI/kg/cm²
- Hose with plug-in nipple
- Measuring tolerance: -15 to 25 °C: ±0.1 bar
- Hose length: 400 mm



Ø 63 mm

9041-1, EAN-No. 4000896147076

Tyre inflator · standard

- Manometer measuring range: 0–12 bar, graduation: 0.1 bar
- Pressure (max.): 12 bar
- Temperature range: -10 to +40 °C
- Scale values in psi and bar
- Hose with plug-in nipple
- Measuring tolerance: -15 to 25 °C: ±0.3 bar
- Hose length: 400 mm

Top seller!



Ø 63 mm



9037N-2, EAN-No. 4000896205578

Blind rivet gun

- Pneumatic, hydraulic
- Suitable for stainless steel rivets up to 6.4 mm
- Professional riveting, suitable for continuous operation with rivets of up to 6.4 mm made of steel, stainless steel, aluminium and copper
- **Possible rivet sizes: 3.0 · 3.2 · 4.0 · 4.8 · 5.0 · 6.0 and 6.4 mm**
- 5 nose pieces (one pre-installed): 2.4 · 3.2 · 4 · 4.8 mm
- Weight (net): 2.11 kg
- Coupler plug (incl.): 7.2 nominal size



9042N-1, EAN-No. 4000896176472

Grease gun, pneumatic

- Continuous pumping of grease
- Gun-filling with grease cartridges, loose grease or via dispenser
- Filling capacity (approx.): 400 ml
- Air requirement: 230 l/min
- Nylon tube: 230 mm
- Metal tube: 172 mm
- Weight (net): 2.0 kg
- Coupler plug (incl.): 7.2 nominal size
- 360° adjustable handle



9040P-1, EAN-No. 4000896209545

Air blow gun

- **Standard nozzle**
- Curved tube: Ø 8 mm, 100 mm
- Working pressure (max.): 16 bar
- Length: 247 mm
- Coupler plug (incl.): 7.2 nominal size



9040-4, EAN-No. 4000896176236

2-way air blow gun

- **Including 112 mm long nozzle!**
- Choice of air supply at tool head or handle
- Pressure regulator
- Exchangeable nozzles (steel)
- Short nozzle for areas with restricted access
- Aluminium housing
- Weight (net): 0.2 kg
- Coupler plug (incl.): 7.2 nominal size
- Thread 1/8" PF 28





9040-42/3, EAN-No. 4000896254767

Cone set, 3 pieces

- Adaptable set for 2-way air blow gun 9040-4
- For safe cleaning with compressed air for clogged or dirty pipes/hoses thanks to cone attachment up to 0.35 mm
- Applicable for fuel, air conditioning and **AdBlue®** lines, hydraulic lines as well as windscreen washer system and coolant
- Coupler thread (outside): 1/8" PF 28

NEW! 3



9040-41, EAN-No. 4000896254781

Stainless steel extension for 9040-4

- Low-lying and stuck ignition coil plugs can be released with the cone set
- Coupler thread (inside and outside): 1/8" PF 28
- Length: 187 mm

NEW!



9040T-1, EAN-No. 4000896252626

Turbo air blow gun

- Cleaning dirty surfaces
- Swirl nozzle generates a strong air pulse for cleaning even stubborn dirt
- **Plastic housing protects against scratches**
- Air inlet: inside thread 1/4" (12.91 mm)
- Coupler plug: nominal size 7.2 (included)
- Hose diameter (recommended): 10 mm
- Pressure (max.): 12 bar
- Sound pressure level (at working pressure): 91 dB(A) Lp A
- Sound power pressure (at working pressure): 102 dB(A) Lp W
- Air requirement: 80 l/min (at working pressure)
- Weight (net): 0.16 kg



Extremely effective due to swirled air impact!

9048P-2/3, EAN-No. 4000896234608

Wash-gun set

- Effective, powerful and solvent-free cleaning of e.g. cooling systems with graduated system cleaning nozzle
- Cleaning without the use of aggressive chemicals or solvents
- Swivel joint at the water connection, helps to avoid "hose spaghetti"
- Continuous independent regulation of water and compressed air supply
- Temperature range -10 to 40 °C
- Weight (net): 0.4 kg
- Coupler plug (incl.): 7.2 nominal size

Contents:

- Water connection variants: 1/2" (13 mm) nipple for water coupling (Gardena system compatible) or 3/4" (20 mm) GHT hose thread
- Jet washing nozzle ①
- Graded system cleaning nozzles ②



9040LG-3/2, EAN-No. 4000896206339


Air blow gun

- **Incl. 90° lateral nozzle (length 32 mm) ① and Venturi nozzle (length 54 mm) ②**
- For cleaning areas with restricted access on vehicles, machinery and agricultural machinery
- Grip area with insulated lance to protect it from cold
- Increased efficiency due to Venturi nozzle (54 mm)
- 90° lateral nozzle (32 mm) enables cleaning of cooling fins
- Pressure (max.): 12 bar
- Working pressure: 6.3 bar
- **Length (total): 1,085 mm**
- Air requirement: 450 l/min (7.5 l/sec)
- Coupler plug (incl.): 7.2 nominal size
- Thread 1/8" PF 28

2



Extra long!



9040LG-3-01, EAN-No. 4000896241514

Venturi nozzle

- **100% increase in air outlet quantity thanks to Venturi effect**
- For blowing out machines, cargo spaces and buildings in industry, agriculture and trade
- Optional Venturi nozzle for 9040-4 and 9040LG-3/2
- Thread 1/8" PF 28



9040LG-3-02, EAN-No. 4000896241521



Lateral nozzle 90°

- **Nozzle allows lateral blowing out**
- Cleaning cooling fins and other hard-to-reach areas
- Optional lateral nozzle for 9040-4 and 9040LG-3/2
- Thread 1/8" PF 28



HAZET hose or cable reel

Offers tidiness in the workshop – cable not left lying around, thus reducing the risk of accidents!

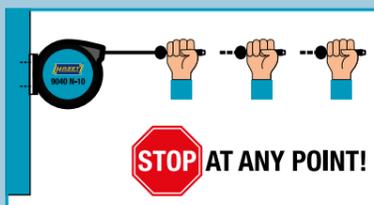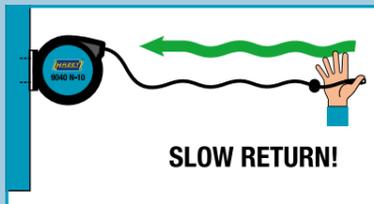

Hose with "Stop at any point" function

9040N

Hose reel

- Suitable for compressed air or water
- Working pressure (max.): 20 bar
- Temperature range: -40 to 60 °C
- Hose length: 15 m
- Length of connection hose: 0.9 m
- Automatic guidance winds the hose neatly
- Braked winding to prevent risk of accidents
- Dimensions: 459 x 378 x 205 mm



No.	HAZET No.	Outside thread mm	Hose inside Ø mm	g	EAN-No. 4000896 +
①	9040N-10	3/8" (16.41 mm)	10	6.45	206445
②	9040N-13	1/2" (20.96 mm)	13	9.50	214648

9040D-2.5, EAN-No. 4000896214631

Cable reel


- Including line circuit breaker
- Only suitable for indoor use
- 230 V AC
- Cable: H07RN-F 3 x 2.5 mm²
- Cable length: 20 m
- Connecting cable length: 1.5 m
- Automatic guidance winds the hose neatly
- Braked winding to prevent risk of accidents
- Weight (net): 9.2 kg



90400S-10, EAN-No. 4000896252602

Open hose reel, 20 m

- Allows visual inspection of the hose
- Automatic hose reel offers tidiness in the workshop – Hose not left lying around, thus reducing the risk of accidents
- Open design against accumulation of dirt
- For compressed air
- Inside diameter of the hose: 10 mm
- Hose length: 20 m
- Max. working pressure: 12 bar
- Spring return with ratchet locking holders
- Including sturdy swivel base
- Integrated roller inlet
- Hybrid polymer hose, black
- Connection hose (length): 1 m
- Air inlet: outside thread 3/8" (16.41 mm)
- Including German air connection nipple for air inlet 9000-015
- Can be used with HAZET safety clutch 9000-061
- Installation via metal bracket or swivel base (included)
- Including ARO 210 nipple
- Weight (net): 11.68 kg



Swivel range: 180°



Including 9000-015

Robust steel design with ball-bearing guiding rails!



9001-061, EAN-No. 4000896258468

Compressed air quick coupling

NEW!

- Extremely durable with a long service life
- For connecting compressed air to pneumatic tools
- Inside thread 3/8" (16.41 mm)
- One-hand operation – Easy operation, even with gloves
- Material: Steel, nickel-plated
- Working range pressure: 0–15 bar
- Ø 24 mm
- Length: 54.5 mm
- For air connection nipple:
 - Germany (standard), Austria, Slovenia, Hungary, China, India, Portugal, Poland, Romania, Turkey NW7.2 Type Rectus corresponds to HAZET nipple 9000-010/3
 - Belgium, France, Netherlands, Switzerland, NW5.5 (Type Aro/Orion/Milton A-Style) corresponds to HAZET nipple 9000-011/3
 - Arab countries, Italy, Spain HAZET Nipple 9000-012
 - Israel/USA corresponds to HAZET nipple 9000-013
 - Lincoln (US Automotive Lubrication System)




Full metal 5 in 1 quick coupling!

9040-7 · 9040S-10

Spiral hose

- High flexible polyurethane hose
- Connecting pieces with 360° swivel joints
- Temperature range: -20 to 60 °C
- Hose length: 7.62 m
- Working pressure: 10 bar

HAZET No.	Hose inside Ø mm	g	EAN-No. 4000896 +
9040-7	6.35	0.63	153404
9040S-10	10	11.68	212361

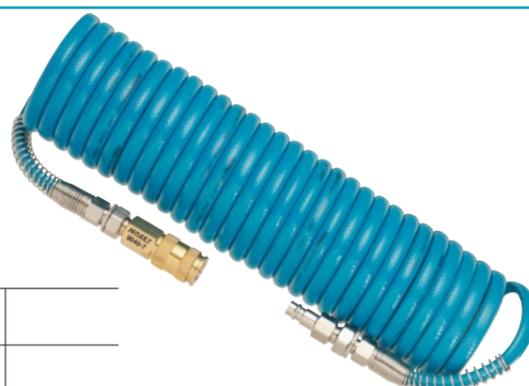

9230
Cordless drill set, 18 V

- Max. tightening torque: 60 Nm
- Brushless DC motor (BLDC)
- Selectable torque settings 15 + 1 drilling
- Vibration acceleration screwing: 0.8 m/s²
- Vibration acceleration drilling 2.3 m/s²
- Robust machine housing
- Suitable for continuous operation



Tool-free metal quick-clamping drill chuck 1–13 mm

HAZET No.		Designation	EAN-No. 4000896 +
9230-010	1	Basic unit (without battery, without charger, without textile bag)	218974
9230-2	3	3-piece set: 1 basic unit, 1 charger, 1 Li-ion battery 2.0 Ah in textile bag	218370
9230-2/4	4	4-piece set: 1 basic unit, 1 charger, 2 Li-ion batteries 2.0 Ah in textile bag	218967

9212SPC
1/2" cordless impact wrench set, 18 V

- Loosening torque (max.): 260 Nm
- Illumination of the work area before the output begins to move
- Extremely handy tool
- Light weight design
- Recommended torque: 200 Nm



Top seller!

HAZET No.		Designation	EAN-No. 4000896 +
9212SPC-010	1	Basic unit (without battery, without charger, without textile bag)	214273
9212SPC-1	3	3-piece set: 1 basic unit, 1 charger, 1 Li-ion battery 2.0 Ah in textile bag	212439
9212SPC-1/4	4	4-piece set: 1 basic unit, 1 charger, 2 Li-ion batteries 2.0 Ah in textile bag	214259

9212
1/2" cordless impact wrench set, 18 V

- Loosening torque (max.): 700 Nm
- Recommended torque: 500 Nm
- Brushless DC motor (BLDC)
- Three selectable power levels for torque tightening:
 - Level 1 80 Nm at 0 – 600 rpm (0 – 1200 impacts/min)
 - Level 2 300 Nm at 0 – 1400 rpm (0 – 2500 impacts/min)
 - Level 3 500 Nm at 0 – 2000 rpm (0 – 3400 impacts/min)



HAZET No.		Designation	EAN-No. 4000896 +
9212-010	1	Basic unit (without battery, without charger, without L-Boxx)	221790
9212-3LB/3	3	3-piece set: 1 basic unit, 1 charger, 1 Li-ion battery 5.0 Ah in L-Boxx	244164
9212-3LB/4	4	4-piece set: 1 basic unit, 1 charger, 2 Li-ion batteries 5.0 Ah in L-Boxx	244171



9212-1000 · 9213-1000
1/2" or 3/4" cordless impact wrench, 18 V

- Loosening torque (max.) 1,400 Nm
- Max. tightening torque: 1,000 Nm
- Brushless DC motor (BLDC)
- Three selectable power levels for torque tightening:
 - Level 1 180 Nm at 0 – 400 rpm (0 – 800 impacts/min)
 - Level 2 400 Nm at 0 – 800 rpm (0 – 1600 impacts/min)
 - Level 3 1000 Nm at 0 – 1800 rpm (0 – 2200 impacts/min)



HAZET No.		Designation	EAN-No. 4000896 +
9212-1000	1	Basic unit (without battery, without charger, without L-Boxx)	222711
9212-1000LB/3	3	3-piece set: 1 basic unit, 1 charger, 1 Li-ion battery 5.0 Ah in L-Boxx	249848
9212-1000LB/4	4	4-piece set: 1 basic unit, 1 charger, 2 Li-ion batteries 5.0 Ah in L-Boxx	249909
9213-1000	1	Basic unit (without battery, without charger, without L-Boxx)	222698
9213-1000LB/3	3	3-piece set: 1 basic unit, 1 charger, 1 Li-ion battery 5.0 Ah in L-Boxx	249886
9213-1000LB/4	4	4-piece set: 1 basic unit, 1 charger, 2 Li-ion batteries 5.0 Ah in L-Boxx	249862

9212M
1/2" mini cordless impact wrench set, 18 V

- Loosening torque (max.): 270 Nm
- Recommended torque: 220 Nm
- Brushless DC motor (BLDC)
- Three selectable power levels for torque tightening:
 - Level 1 100 Nm at 0 – 700 rpm (0 – 1,200 impacts/min)
 - Level 2 190 Nm at 0 – 1,600 rpm (0 – 2,000 impacts/min)
 - Level 3 220 Nm at 0 – 2,500 rpm (0 – 3,200 impacts/min)



High efficiency and durability thanks to brushless motor

HAZET No.		Designation	EAN-No. 4000896 +
9212M-010	1	Basic unit (without battery, without charger, without textile bag)	214280
9212M-1	3	3-piece set: 1 basic unit, 1 charger, 1 Li-ion battery 2.0 Ah in textile bag	212446
9212M-1/4	4	4-piece set: 1 basic unit, 1 charger, 2 Li-ion batteries 2.0 Ah in textile bag	214266

9233


Cordless right-angle grinder set, 18 V

- Idle speed (max.) 8,000 rpm
- Brushless DC motor
- Including 1 protective cover each
 - for cut-off wheels
 - for rough grinding wheels



Mesh fabric protects motor from dirt

HAZET No.		Designation	EAN-No. 4000896 +
9233-010	1	Basic unit (without rechargeable battery, without charger)	218943
9233-7	3	3-piece set: 1 cordless right-angle grinder, 1 quick charger, 1 Li-ion battery 18 V, 5.0 Ah	218325
9233-7/4	4	4-piece set: 1 cordless right-angle grinder, 1 quick charger, 2 Li-ion batteries 18 V, 5.0 Ah	218950

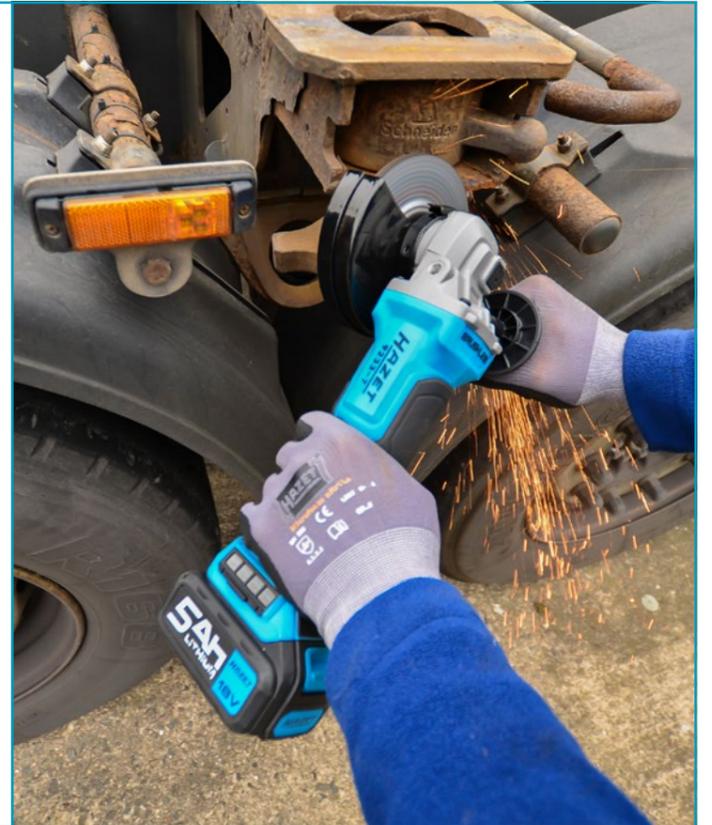

9212

HAZET rechargeable battery system – Suitable for all devices!

No.	HAZET No.	Designation	EAN-No. 4000896 +
①	9212-05	Replacement battery · 5 Ah	210367
②	9212-02	Replacement battery · 2 Ah	213788
③	9212-03	Battery charger	204823



1979W1/3, EAN-No. 4000896241408


LED light set

Contents:

- 1979W-82 LED pocket light
- 1979W-92 LED slim light
- 1979WP-2 Charging pad for 2 lights
- Incl. 100 cm USB-C cable and 2 A / 5 V power supply unit



3



120° adjustable (5 levels)



Incl. charging cable + plug adapter for the charging pad

1979W2/3, EAN-No. 4000896258208

LED light set, wireless charging

Contents:

- 1 x 1979W-11 pen light
- 1 x 1979W-85 solid light
- 1979WP-2 Charging pad for 2 lights
- Incl. 100 cm USB-C cable and 2 A / 5 V power supply unit



3

NEW!



Incl. charging cable + plug adapter for the charging pad

1979N-71, EAN-No. 4000896208470

LED pen light

- The range of light (130 lumens) is reached from up to 75 meters
- Power supply: Batteries/rechargeable batteries 2 x 1.5 V-Micro/AAA/(L)R03
- Operating time 100%: approx. 4 hours.
- Length: 139 mm



1979N-72, EAN-No. 4000896208487

LED torch light

- Continuous one-hand focusing enables precise spotlight up to homogeneous floodlight (range of light: 175 m)
- Stable design protects against dust and splash water (IP54)
- Power supply: Batteries/rechargeable batteries 3 x 1.5 V-Micro/AAA/(L)R03
- Operating time 100%: approx. 4.5 hours.
- Length: 135 mm



HAZET video borescope with HD camera – optimum detail!


- Bright and sharper image • Better details • Clearer image



4812-11/5FS, EAN-No. 4000896249572

HD borescope set with front and side camera, Ø 4.9 mm

5



Front and side camera

Switchable probe head!




- 5-piece set in plastic case:**
- Basic unit 4812-11G
 - HD probe 4812-11FS
 - SD card 32 GB
 - Micro HDMI cable (A to D) 1.8 m
 - USB-C cable (A to C) 1 m



4812-23/5AF, EAN-No. 4000896249824

HD touch screen borescope set with swivelling probe 180°, Ø 3.9 mm

5



180°

Swivelling probe head!



- 5-piece set in HAZET L-Boxx 136:**
- Basic unit 4812-23G
 - HD probe 4812-23AF
 - SD card 64 GB incl. adapter
 - Micro HDMI cable (A to D) 1.8 m
 - USB-C cable (A to C) 1 m




Built-in microphone!

Marking details of photos on the touchscreen – Creating folders!

Split screen: Side-by-side display of recording and live image!

	4812-11/5FS	4812-23/5AF
Camera probe	Ø 4.9 mm semiflexible probe with dual camera 90° and 180° (see ①)	Ø 3.9 mm probe with front camera can be swivelled up to 180° (articulation see ②)
Display	90 mm (3.5") large reflection-reduced LCD display	127 mm (5") large, sunlight-readable, reflection-reduced touch display
Zoom	1.5 x and 2 x	3 x
Display resolution	320 x 240 pixels	800 x 480 pixels
10-level brightness setting	(5 + 5 boost)	(5 + 5 boost)
Energy source	4 x AA battery alternative power supply via USB-C socket	Rechargeable Li-ion battery. Charging time: 3.5 h, operating time: 4 h
Image format (jpg)	1920 x 1080 pixels	1920 x 1080 pixels
Video format	MP4, 1920 x 1080 pixels (MOV format) with optional timestamp	MP4, 1920 x 1080 pixels (MOV format) with optional watermark, timestamp and audio
Data transfer	USB-C (access either to camera or as card reader)	USB-C (access either to camera or as card reader)
IP protection rating (basic unit)	IP54	IP54
Handling	With handle	Positioning via magnetic foot – enables hands-free inspection
Tripod thread	✓	✓
Mirroring of the camera image	✓	✓
Negative representation	✓	✓
Connectivity	Camera can be used via HDMI on the display or USB-C on the PC	Camera can be used via HDMI on the display or USB-C on the PC
PC software	✓	✓
Weight	370 grams without batteries	705 grams
Dimensions (L x W x H)	276 x 123 x 54 mm	162 x 128 x 46 mm



Negative representation

HAZET thermal cameras – for optimum viewing clarity!

1992-1, EAN-No. 4000896244270

Thermal camera

- Screen size: 2.4" LCD screen
- Display resolution: 320 x 240 pixels
- Thermal (or IR) resolution: 160 x 120 pixels
- Field of view: 37.2° x 50°
- Temperature measuring range: -20 to 550 °C (-4 to 1,022 °F)
- Battery life: up to 8 hours
- Dimensions (H x W x D): 196 x 117 x 59 mm
- Weight: 0.35 kg



Exchangeable SD card



Power supply: USB cable (Micro USB)



1992-2, EAN-No. 4000896249435

Thermal camera

- Screen size: 3.5" LCD touchscreen
- Display resolution: 640 x 480 pixels
- Thermal (or IR) resolution: 256 x 192 pixels
- Field of view: 50° x 37.2°
- Temperature measuring range: -20 to 400 °C (-4 to 752 °F)
- Battery life: up to 4 hours
- Dimensions (H x W x D): 138.5 x 85.2 x 23.6 mm
- Weight: 0.22 kg

More detail through visual camera: 3,264 x 2,448 pixels (8MP)!

Touchscreen!

Digital zoom 4x!

Record videos!



Detailed information



195N-2, EAN-No. 4000896252169

Creep board

- Ergonomically shaped: cut out arm areas for optimal elbow room
- **High capacity up to 150 kg**
- Smooth-running swivel castors with rubber running surface, oil resistant and low-noise
- Practical carrying handle in the foot area
- Six castors made of hard plastic (Ø 70 mm)
- Practical storage compartments for tools and small parts on the right and the left
- Soft padded headrest
- Dimensions (L x W x H): 1,030 x 480 x 115 mm

Work comfortably under vehicles!



Soft padded headrest



195N-3, EAN-No. 4000896256761

Creep

- **High capacity up to 150 kg (lying or sitting)**
- 6 castors (Ø 63 mm)
- Combines creeper and seat
- Quick and easy conversion from creeper to seat and vice versa
- Cushioned reclined surface, lead part in HAZET blue
- Sturdy steel tube frame with 2.4 mm material thickness
- Dimensions (L x W x H): 1,198 x 440 x 135 mm (lying position)
- Seat height: 420 mm
- Seat surface: 300 x 310 mm

NEW!

Now new: Sturdy steel tube frame with 2.4 mm material thickness!



9070-10, EAN-No. 4000896158157

Magnetic holder

- Loading capacity: 10 kg
- Height: 400 mm



197-10, EAN-No. 4000896254392

Magnetic holder

- Grippy texture
- Rubberised contact surface
- HAZET own product design
- Suspension of pneumatic or water hoses as well as bags or rucksacks
- Holder dimensions (L/Ø): 86.5/72 mm
- Logo dimensions (L x W x H): 72 x 29 x 13 mm
- Magnetic pull-off force (axial max.): 18 kg



Strong magnet



Made in Germany



197-11/3, EAN-No. 4000896255191

Magnetic button set

- Attachment of drawings or other information sheets to metallic surfaces
- Universal application
- Magnetic pull-off force (max.): 3 kg
- Contents: 3x magnetic button



Made in Germany



4961N-23/12, EAN-No. 4000896186754

Wheel hub grinder

- **Special grinder for optimal cleaning of the bearing surface of a wheel rim (wheel hubs) on trucks and transporters with stud bolt**
- Hook and loop fastener for quick changing of grinding wheels
- Inc. 5 grinding wheels for moderate dirt and 6 for heavy dirt
- With hexagon insert for firm hold on the device
- **Octagonal profile** for safe and firm fixation
- Inside Ø (max.): 23 mm
- Grinding wheels Ø: 56 mm



Made in Germany

For stud bolts! No chip removal!



197 Multifunctional drain pans



Made in Germany

No.	HAZET No.	Filling capacity l	EAN-No. 4000896+
①	197N-1	6	198924
②	197-2	16	146802
③	197-50	50	210008

What makes our sockets so special?

Impact wrench compatibility combined with impact adapter to 3/4" ensures smooth operation even in demanding applications.

One power adapter – many possibilities!



For all sockets with outside hexagon $s\ 24\ \text{mm}$

$s\ 24\ \text{mm}$
 $1/2"$



$3/4"$

$3/4"$



990S/11, EAN-No. 4000896162406

1/2" · 3/4" XZN profile set

- Screw connections on commercial vehicles and passenger cars with XZN profile e.g. on chassis, brake system (brake carriers), engines, shock absorbers and camshaft sprocket
- M14 · M16 · M18 in short (43 mm) and long (75 mm) design



985S/11, EAN-No. 4000896211951

1/2" · 3/4" hexagon profile set

- Screw connections on commercial vehicles and passenger cars, e.g. on chassis, brake system (brake carriers), engines and shock absorbers
- $s\ 14 \cdot 17 \cdot 19\ \text{mm}$ in short (45 mm) and long (75 mm) design



900SZ6/11, EAN-No. 4000896225378

1/2" · 3/4" 12-point traction profile set

- $s\ 19 \cdot 21 \cdot 22 \cdot 24 \cdot 27 \cdot 30 \cdot 32 \cdot 36\ \text{mm}$
- Outside hexagon: 24 mm



985S

1/2" supplement to 985S/11



Made in Germany

No.	HAZET No.	S mm	l mm	EAN-No. 4000896+
①	985S-22	22	45	218219
②	985S-24	24	45	218226

Drive optionally with 1/2" or $\bullet\ 24\ \text{mm}$

985S-14LG/4, EAN-No. 4000896243686

1/2" · 3/4" brake calliper screwdriver socket

- For the operation of the brake calliper screw connections (KNORR-BREMSE) on MERCEDES-BENZ trucks e.g. Actros, Arocs, Antos and buses such as e.g. Citaro, CapaCity Turismo, Intouro and Travego
- Operation of gearbox screw connections as well as screw connections is possible on frame and chassis
- Impact wrench operation is possible with e.g. HAZET 9013TT
- Length (total): 109 mm



2784-T60/4, EAN-No. 4000896188611

3/4" brake disc screwdriver socket set

- For impact operation
- Drive allows transmission of high separation forces
- For the operation of the brake disc screw connections on MERCEDES-BENZ Actros
- Length (total): 154.5 mm



163-570/24, EAN-No. 4000896233441

1/2" · 3/4" impact socket set

- Suitable for HAZET Assistort with drawer depth of 398 mm: 173 · 179 · 179N(X) · 179W · 179NW · 179BIG-1 · 179XL · 179NXL · 179XXL · 179NXXL · 179AXXL · 179TXXL · 180



Made in Germany

No.	HAZET No.	Symbol	Contents
①	900SZ6		$s\ 19 \cdot 21 \cdot 22 \cdot 24 \cdot 27 \cdot 30 \cdot 32 \cdot 36\ \text{mm}$
②	985S		$s\ 14 \cdot 17 \cdot 19\ \text{mm}$, short 45 mm
③	985SLG		$s\ 14 \cdot 17 \cdot 19\ \text{mm}$, long 75 mm
④	990S		M14 · M16 · M18, short 43 mm
⑤	990SLG		M14 · M16 · M18, long 75 mm
⑥	1007S-7/4		Adapter set 1/2" · 3/4"



Made in Germany

900SK/10, EAN-No. 4000896246434

12.5 1/2 10

1/2" impact socket set

- Particularly suitable together with short 1/2" impact wrenches e.g. HAZET 9012ATT, HAZET 9012PTT
- With borehole for locking pin or safety spring and groove for O-ring
- Surface: phosphatized, oiled
- DIN 3129, ISO 2725-2
- For impact operation
- Length (total): 29 mm
- s 13, 14, 15, 16, 17, 18, 19, 21, 22, 24 mm



Extra short design!




Made in Germany

No.	HAZET No.	d ₁ mm	d ₂ mm	f mm
①	900SK-13	20.8	25	7.0
②	900SK-14	22.1	25	7.0
③	900SK-15	23.5	30	7.2
④	900SK-16	24.8	30	7.2
⑤	900SK-17	26.2	30	7.2
⑥	900SK-18	27.5	30	8.7
⑦	900SK-19	28.8	30	11.0
⑧	900SK-21	31.3	30	11.5
⑨	900SK-22	32.5	30	12.3
⑩	900SK-24	35.0	30	12.2



In 1/9 soft foam insert



Made in Germany

1000SLG · 1100SLG


20 3/4 25 1"

3/4" · 1" impact socket (6-point)

- Long design!
- With borehole for locking pin or safety spring and groove for O-ring
- Surface: phosphatized, oiled
- DIN 3129, ISO 2725-2



1000SLG
• Length: 100 mm




Made in Germany

HAZET No.	d ₁ mm	d ₂ mm	f mm	EAN-No. 4000896+
1000SLG-24	39.5	44	17	001392
1000SLG-27	43.5	44	19	001408
1000SLG-30	47.5	44	21	001422
1000SLG-32	50.0	44	21	001439
1000SLG-33	51.5	44	21	001446
1000SLG-36	55.0	44	23	001460



1100SLG
• Length: 110 mm



Made in Germany

HAZET No.	d ₁ mm	d ₂ mm	f mm	EAN-No. 4000896+
1100SLG-24	41.5	54	17	002405
1100SLG-27	45.0	54	19	002412
1100SLG-30	49.0	54	21	002429
1100SLG-32	51.5	54	215	002436
1100SLG-33	52.5	54	215	002443
1100SLG-36	56.5	54	23	002467
1100SLG-38	59.0	54	24	002474
1100SLG-41	63.0	54	26	002481
1100SLG-46	69.5	54	28	002498



1004S · 1104S

20 3/4 25 1"

3/4" · 1" impact socket (6-point)

- DIN 3129, ISO 2725-1

1004S-32

- Especially long 6-point socket design e.g. for deep wheel nuts and bolts on commercial vehicles
- For impact operation
- Surface: phosphatized



1004S-33

- Extra long design
- E.g. for deeply located wheel nuts and bolts on commercial vehicles
- With borehole for locking pin or safety spring and groove for O-ring




1104S-32

- For impact operation
- With bolt for locking pin retaining
- Surface: phosphatized



Made in Germany

No.	HAZET No.	□	l mm	d ₁ mm	d ₂ mm	f mm	EAN-No. 4000896+
①	1004S-32	20 3/4	400	48.0	44.0	32.0	055784
②	1004S-33	20 3/4	400	48.0	44.0	32.0	055791
③	1104S-32	25 1"	270	48.5	54.0	30.5	002665




1000, EAN-No. 4000896000616

3/4" socket set

- Sheet metal box (HAZET blue)
- Soft foam insert
- Dimensions (L x W x H): 578 x 235 x 88 mm

Contents

- **Reversible ratchet head 1016**
20 3/4"
- **Socket 1000**
20 3/4" • 22 • 24 • 27 • 30 • 32
36 • 38 • 41 • 46 • 50 mm
- **Extension 1017-8**
20 3/4" • 20 3/4"
- **Extension 1018**
20 3/4" • 20 3/4"
- **Handle bar 1014**
Length: 500 mm
- **Sliding head 1015-1**
20 3/4"



Made in Germany


1100Z, EAN-No. 4000896002504

1" socket set

- With 12-point sockets
- Sheet metal box (HAZET blue)
- Dimensions (L x W x H): 759 x 305 x 115 mm

Contents

- **Reversible ratchet head 1116**
25 1"
- **Socket 1100Z**
25 1" • 32 • 36 • 41 • 46 • 50 •
55 • 60 • 65 • 70 • 75 • 80 mm
- **Extension 1117-8 • 1117-16**
25 1" • 25 1"
- **Handle bar 1114**
Length: 700 mm
- **Sliding head 1115-1**
25 1"
- **Universal joint 1121**
25 1" • 25 1"



Made in Germany

652, EAN-No. 4000896028702

Tyre lever

- Heavy design
- Length: 600 mm
- Weight: 1,130 g



Made in Germany

653, EAN-No. 4000896028719

Tyre lever

- Heavy design
- Length: 456 mm
- Weight: 630 g



Made in Germany

705N, EAN-No. 4000896029389

Four-way rim wrench

- For passenger cars, vans and people carriers
- Surface: chrome-plated
- DIN 3119, ISO 6788
- Output: outside hexagon profile
- Length: 380 mm
- Weight (net): 1,390 g
- For manual operation
- **Wrench size: 17 x 19 x 13/16 x 21 mm**



Made in Germany

705V-02, EAN-No. 4000896029396

Four-way rim wrench

- For passenger cars, vans and people carriers
- For 1/2" sockets of Series 900
- Surface: chrome-plated
- DIN 3119, ISO 6788
- Output: outside hexagon profile
- Length: 380 mm
- Weight (net): 1,330 g
- For manual operation
- **Wrench size: 17 x 19 x 22 mm**



1/2"

Made in Germany

705V, EAN-No. 4000896196388

Four-way rim wrench

- For passenger cars, vans and people carriers
- Firmly secured sleeves to prevent scratches in the rim hole
- Coloured sleeves for quick recognition of wrench sizes
- All common wrench sizes in one
- With 12.5 = 1/2" for sockets of Series 900
- Surface: chrome-plated
- DIN 3119, ISO 6788
- Output: outside hexagon profile
- Length: 380 mm
- Weight (net): 1,330 g
- For manual operation
- **Wrench size: 17 x 19 x 21 mm**



1/2"

Made in Germany

2784S-1 · 2784SLG-1

125 1/2"

1/2" impact socket (special profile) MERCEDES-BENZ

- Optimised special profile for damage-free attachment of the flat-head lightweight nuts
- For the operation of the lightweight nuts on the frame, fifth-wheel coupling, front carrier and vibration damper with special profile **MERCEDES-BENZ** on the Actros, Antos, Arocs, model year 2016 →
- Surface: phosphatised
- Output: groove profile



Made in Germany

No.	HAZET No.	Type	l mm	EAN-No. 4000896+
①	2784S-1	short	46	213252
②	2784SLG-1	long	75	218240



2784SR-1, EAN-No. 4000896229758

125 1/2"

1/2" striking face wrench (special profile)


- **Special application in case of lack of space due to design and very low vehicle body**
- Optimised special profile for damage-free attachment of the flat-head lightweight nuts
- Wrench flat with laser-engraved formula for calculating the correct effective length
- For the operation of the lightweight nuts on the frame, fifth-wheel coupling, front carrier and vibration damper with special profile **MERCEDES-BENZ** on the Actros, Antos, Arocs, model year 2016 →
- Surface: phosphatised



Made in Germany

4800

Cooling pump and adapter

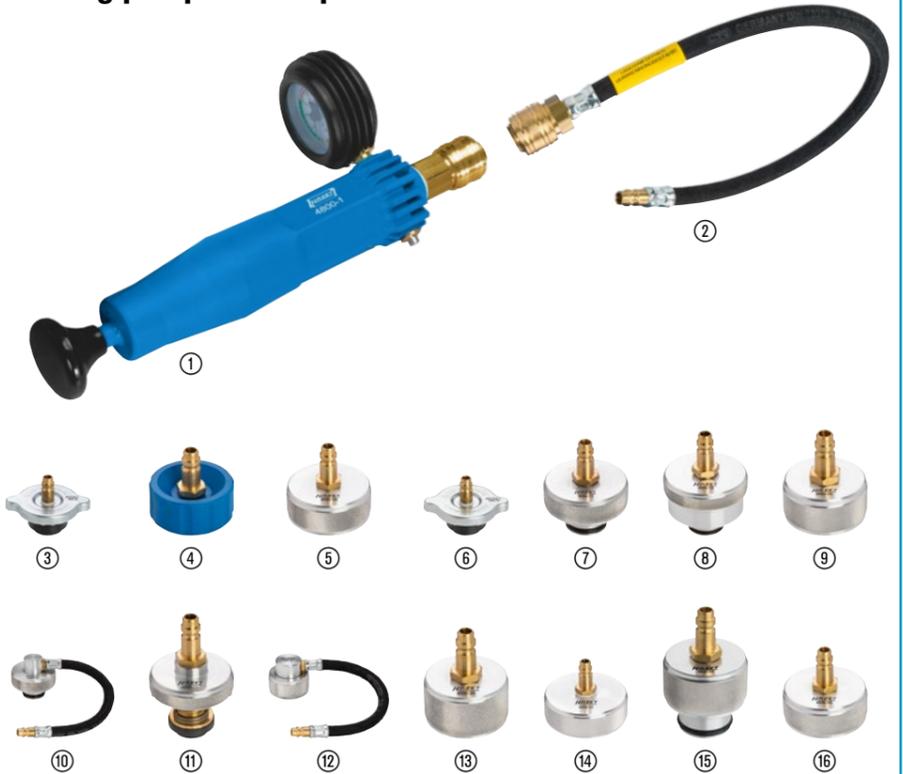

Made in Germany

No.	HAZET No.	Components	EAN-No. 4000896+
①	4800-1	Cooling pump to 2.5 bar	022243
②	4800-2	Intermediary piece, flexible hose	022274
③	4800-3	AMAZONE Pantera · CLAAS Jaguar, Lexion, Scorpion, Ares, Atlas, Ceres · DAF 45 model year 05/1991 → 12/2000 · DOOSAN wheel excavators S · Caterpillar excavators DX · FENDT · KAESER Mobilair · LIEBHERR A308-316 · MASSEY FERGUSSON with container no. 180224M92 and 4296015M1 · MERCEDES-BENZ Vito · Viano · Solaris · NISSAN forklifts · PUTZMEISTER BSA 1409 · SCANIA Vabis · CASE Quadtrac, Magnum	022281
④	4800-4A	DEUTZ engines 3.6 PowerPack · BF6M1013FC · TCD2013L6 2V and 4V Genset 250kV · HATZ 4H50tic · IVECO Eco Daily with blue lock · CASE Puma, SBS, LBS, Optum, Maxxum, CVX · NEW HOLLAND TVT, T7, T7 Elite Pack, T6 · FENDT Vario model year 2000 → combine harvesters L-Series · CLAAS Arion, Axion	156504
⑤	4800-5A	COMPAIR Mobil compressor with VW expansion tank · FENDT Farmer 300 model year 1988 → · Type 500 · Type 700 · Vario model year 1988 → 2000 · LINDE forklifts · PUTZMEISTER BSA 1407D · BSA 2110 HP-D · RENAULT Midlum model year 01/2000 → 12/2013 · Volvo FE model year 05/2006 → · FL model year 03/2000 →	161843
⑥	4800-16	DEUTZ engines KHD1015 · D2008 · D2009 · TD2.9 L4 · TCD3.6 · BFM1013 · BFM2012 · TCD2013 2V · BFM1015 · TCD2015 V8 · V6 · M · TCD 12.0 and 16.0 · MERCEDES-BENZ Sprinter model year 1999 → Type 170 · 208 · 611	098507
⑦	4800-17	JOHN DEERE tractors of Series 5, 6, 7, 8 and 9 · Forage harvesters of Series 8000 and 9000 · Self-propelled sprayer R4040, R4050, R4140 and 4150 · Windrower W170 · Cotton picker CP690 · Excavator 160DLC · Crawler dozer 700J · WHEEL LOADERS WL53, WL56 · HITACHI excavator ZAXIS 6 · HAGIE STS 10, 12, 14 and 16	109661
⑧	4800-18	MERCEDES-BENZ Sprinter since 2006, Viano since 2003	128815
⑨	4800-20	IVECO Euro-Star · Euro-Tech · Euro-Truck · Daily with black lock · MAN F90 · F2000 · TGA model year 03/2000 → · TGL model year 04/2005 → · TGM model year 10/2005 → · TGS model year 10/2007 → 01.2012 · TGX model year 10/2007 → 01/2012 · MERCEDES-BENZ commercial vehicles Actros · Atego 1217 model year → 1999 · Eco 8401 · SK1728 Antos · Arocs · Atego model year 1998 → 2013 · Axor model year 09/2001 → 10/2004 · Econic · Zentros · CLAAS Xerion, Tucano	144242
⑩	4800-21A	Volvo commercial vehicles · Scraper tractor dumpers	162185
⑪	4800-23	ISUZU commercial vehicles · MITSUBISHI commercial vehicle Fuso Canter · NISSAN forklifts · YALE GDP/GLP 16-30	144273
⑫	4800-25	MAN buses such as Lions Coach · Lions Star · Lions Comfort · Lions City · MERCEDES-BENZ Citaro model year 01/1998	203857
⑬	4800-26	DAF CF and XF Euro 6 from 2013	214495
⑭	4800-27	MERCEDES-BENZ Atego from model year 2014	214501
⑮	4800-28	MERCEDES-BENZ Actros EURO 6 with HEYCO expansion tank from model year 2014	214518
⑯	4800-29	SCANIA 143, G-/P- and R series	222780

4802-1, EAN-No. 4000896200030

Commercial vehicle vacuum radiator filler

- **Fast cooling fluid flow rate: approx. 80 l in approx. 20 minutes**
- No cooling fluid is lost through the cooling system overflowing
- Separate control through the diagnostic testing device is no longer necessary
- Vacuum leakage test before filling the cooling system
- **Bubble-free filling of the cooling and heating circuit in trucks, buses, agricultural machinery and construction vehicles**
- Can be used together with single or universal adapters (see table on right)



80 litres in 20 minutes!

Made in Germany

9098/24, EAN-No. 4000896258086

Injector sliding hammer, pneumatic

- For removing stuck diesel injectors
- 21 different adapters and a universal claw can be used to gently loosen stuck diesel injectors without much effort
- Depending on the injector version, the piezo element must be removed for this purpose
- This prevents damage to the cylinder head/cylinder head cover due to high forces from supports
- In plastic case



24-piece set:

- Pneumatic diesel injector puller
- Extension for deep-seated injectors or installed installation spaces
- Universal claw
- 21 adapters:
 - M17 x P1.0 for **BOSCH** 110,
 - M18 x P 0.75 for **BOSCH** 120, 20 x P 1.0 for **Denso/A**
 - Adapter with inside thread M12 x P 1.5, outside thread M20 x P 1.5
 - Adapter with inside thread M14 x P 1.5, outside thread M22 x P 1.5, M14 x P 1.5 for **Delphi**
 - M16 x P1.0 for **TOYOTA**
 - M18 x P1.5, M8 x P1.0, M8 x P1.25, M10 x P1.0 universal adapter
 - M14 x P1.5, M14 x P1.0, M25 x P0.5 for **Denso**
 - M25 x P1.0 for **SIEMENS**
 - M27 x P0.75 for **BOSCH, FIAT, BMW, PSAW, PSA, MERCEDES, RENAULT**
 - M27 x P1.0 for complete thread for **SIEMENS**, M29 x P1.0 for **Delphi**
 - M31 x P0.75 for **BOSCH CRIN 1**
 - M26 x P0.75 for **BOSCH CRIN 2**

NEW!

24

Gentle and careful working!

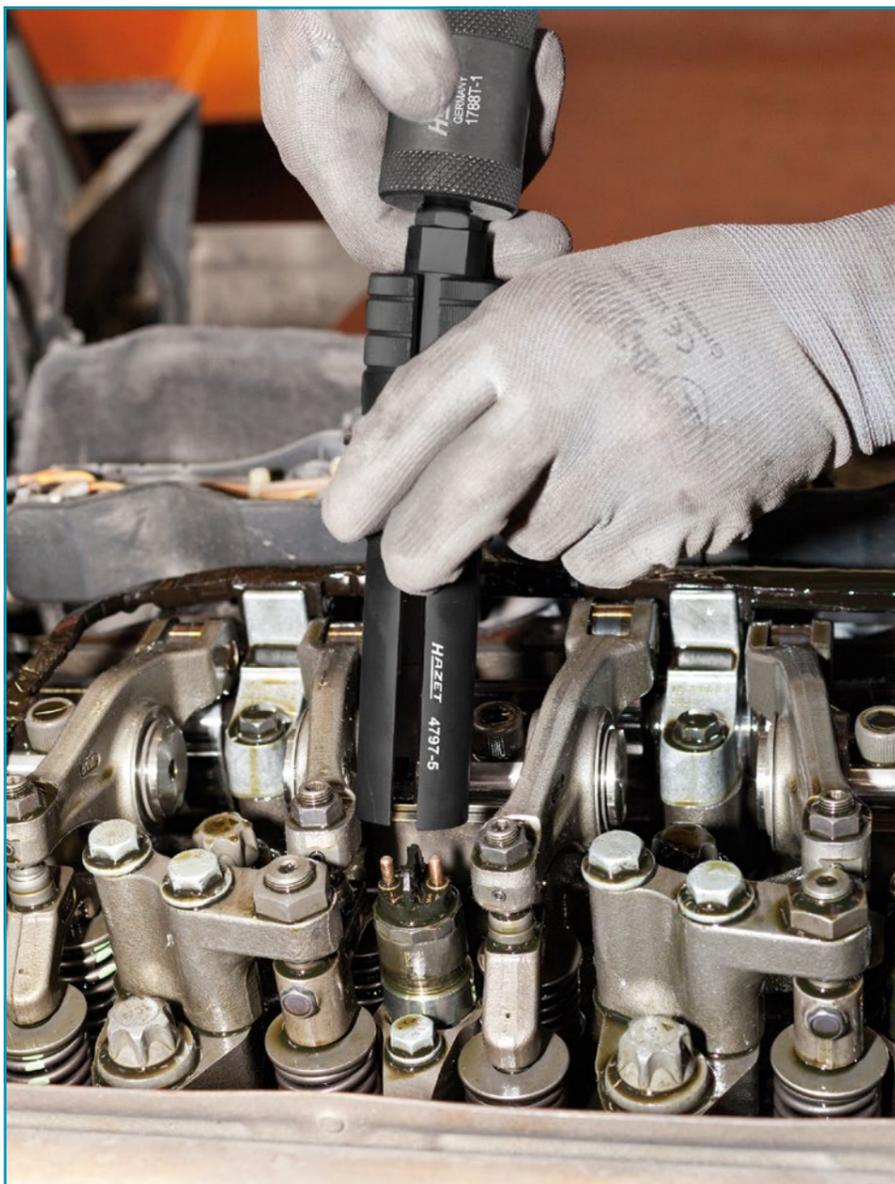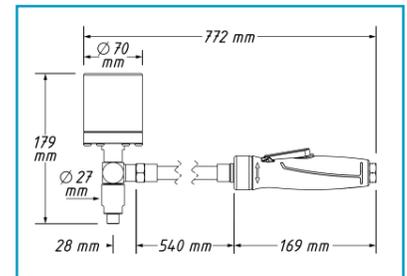

4797-5, EAN-No. 4000896176137

Injector extractor

- For disassembly of tight common rail injectors without removing the cylinder head
- For the simple removal of injectors together with sliding hammer, e.g. HAZET 1788T-1, on MAN engines D08, D20, D26 and D28
- Especially suited to the very limited space in the cylinder head
- Due to the tool's special claw, the injector may be gripped with caution, damage-free removal with the aid of the impact extractor
- Injector claw with inside thread M10 x 1.5 mm for insertion of the sliding hammer 1788T-1

Made in Germany



Can be used in combination with 1788T-1!

1788T-1, EAN-No. 4000896134304

Sliding hammer

- With coupler thread M 10 (sliding weight 200 g)
- Together with injector extractor 4797-5
- Coupler thread M10
- Incl. union nut

Made in Germany



Exhaust probe sockets

- Robust design for fixed exhaust gas probes!
- Removal and installation of the lambda probe, particle sensor, NOX sensor and exhaust gas temperature sensor
- Double square 1/2" drive
- Additional hexagon drive
- Torque-controlled tightening possible

- Suitable for all passenger car and commercial vehicle models
- Also suitable for closing the slot to avoid widening the opened hexagon
- For manual operation
- Surface: phosphatized, oiled
- Dimensions: L 66 x H 39 mm
- Slot width: 8 mm



● s 24 mm

s 14 mm

4680-7,
EAN-No. 4000896254118

Exhaust probe socket

- Length: 66 mm

● s 24 mm

s 17 mm

4680-8,
EAN-No. 4000896254132

Exhaust probe socket

- Length: 66 mm

● s 24 mm

s 19 mm

4680-9,
EAN-No. 4000896254156

Exhaust probe socket

- Length: 66 mm

● s 30 mm

s 22 mm

4680-5,
EAN-No. 4000896057870

Exhaust probe socket

- Length: 66 mm

● s 30 mm

s 24 mm

4680-6,
EAN-No. 4000896252268

Exhaust probe socket

- Length: 66 mm

Special tap for exhaust gas temperature sensors / probes

- Professional repair, cleaning or repairing of the mounting threads of the exhaust gas temperature sensors / probes
- Guide bolt prevents jamming of the thread repair tool, thereby enabling exact repair or cleaning of the sooty or damaged thread
- No tilting or jamming during repair

- Time saving: replacement of the exhaust system is no longer necessary in most cases
- 6 cutting surfaces for optimal fitting accuracy as well as easy and quick handling
- High-quality TiAlN coating for longer service life
- Suitable for application on stainless steel components
- Drive: s 13 mm



4683 Thread repair tool for exhaust gas temperature sensors / probes



No.	HAZET No.	Use	Thread mm	Length: mm	EAN-No. 4000896 +
①	4683-12	For exhaust gas temperature sensors on: IVECO	M12 x 1.25	55	253555
②	4683-14	For exhaust gas temperature sensors on: MERCEDES-BENZ Truck · AUDI · PORSCHE · SEAT · ŠKODA · VW · FIAT · ALFA ROMEO · LANCIA · OPEL	M14 x 1.5	45	253579
③	4683-16	For exhaust gas temperature sensors on: MERCEDES-BENZ Trucks, Bus & DAF commercial vehicles Actros (930, 932, 933, 934, 938) · Axor (375, 940, 942, 943, 944, 950, 952, 953, 954, 958) · Atego (375, 950, 952, 953, 954, 958) · MB Bus O 500 BM382 · DAF CF 65 · DAF CF 75 · DAF CF 85 · DAF CF 105	M16 x 1.5	43	253593
④	4683-20	For NOX sensors on: DAF · MERCEDES-BENZ TRUCKS · IVECO · MAN · SCANIA · RENAULT TRUCKS · Volvo TRUCKS	M20 x 1.5	50	253630
⑤	4683-22	For particle sensors on: MERCEDES-BENZ · MAN	M22 x 1.5	50	253654

163-611/10, EAN-No. 4000896257294 Tool set for exhaust probes

- 10-piece set:
 - Special taps: 4683-12, 4683-14, 4683-18, 4683-20, 4683-22
 - Exhaust probe sockets: 4680-5, 4680-6, 4680-7, 4680-8, 4680-9

4683-16
Optionally available



NEW!

10

Optionally available:
Tool box for safe storage



HAZET No.	EAN-No. 4000896 +
165-L	167777


4937-92, EAN-No. 4000896201952

3/4" commercial vehicle pin wrench for front axle MAN

- Pin wrench for: **MAN** trucks: E 2000 (ÖAF), F 2000, M 2000 L, M 2000 M
- **MAN** TGA, TGM, TGS, TGX
- **MAN** buses: Lions City, Lions Classic, Lions Coach, Lions Regio, Lions Star as well as older constructions (models), chassis
- **NEOPLAN** Cityliner, Starliner, Tourliner, Trendliner
- **TEMSA** Diamond, **WISEON** high-decker
- Diameter: 114 mm
- Length (total): 84 mm



3/4" 46

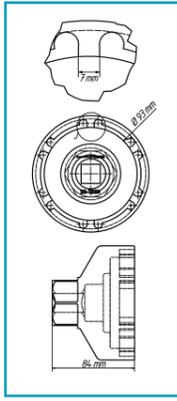

Made in Germany

20 3/4" 46


4937-62, EAN-No. 4000896199020

3/4" commercial vehicle pin wrench for rear axle MERCEDES-BENZ

- Pin wrench for rear axle nuts
- **MERCEDES-BENZ** Actros, Atego (heavy design): LN2, SK rear axle
- With outside guide collar
- Inside \varnothing : 62.8/70 mm
- 6 inside pins, pin width: 7.5 mm
- Length (total): 85 mm



3/4"



Made in Germany

20 3/4"


4937-111/2, EAN-No. 4000896201945

1" commercial vehicle pin wrench set for rear axle MAN

- For **MAN** TGX, TGA, TGS e.g. rear axle: HY 1350
- 4-point drive: 1" (25 mm) and outside 6-point: s 60 mm
- 6 pins, width: 11 mm
- Inside \varnothing : 134.5 mm
- Inside \varnothing (pin-pin): 118 mm
- Outside \varnothing : 148.5 mm
- Length (total): 121 mm



1" 60

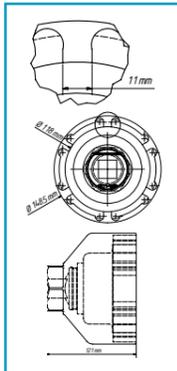

Made in Germany

25 1" 60 2

4937-101/4, EAN-No. 4000896199266


3/4" commercial vehicle pin wrench set for rear axle MERCEDES-BENZ

- For dismantling / assembly work on the rear axle as well as repair and maintenance work on the wheel hub, wheel bearing or brake disc
- **MERCEDES-BENZ** hub-reduction axle, such as trailing axle NR7/4
- **MERCEDES-BENZ** hub-reduction rear axles (Euro-axles) 10 t and 13 t,
- **MERCEDES-BENZ** hub-reduction axle 7 t AL7/1
- Inside \varnothing : 101.5 mm
- Length including guide tube (total): 140 mm
- 12 pins, width of pins: 11.4 mm
- With 3 replaceable guide tubes
- Outside \varnothing : 50, 51, 53 mm
- Length (total): 85 mm



3/4"

Made in Germany

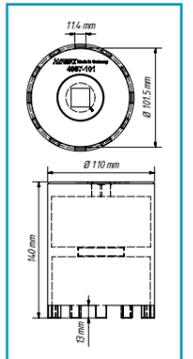

20 3/4" 4

4937

Commercial vehicle axle nut socket

- Solid design: high (shape) stability even with very high loosening or tightening torques
- Surface: burnished



36

36

3/4"

Made in Germany

20 3/4" 36

No.	HAZET No.	Drive	Output s mm	Application	EAN-No. 4000896+
①	4937-85	• s 36	85	SAF trailer axles	204267
②	4937-90	• s 36	90	IVECO Daily 6.5 t; 7.0 t	199280
③	4937-95	20 3/4"	95	IVECO Stralis and Eurofire, MERCEDES-BENZ Discos Trailer, BPW Eco plus	199457

4937-103/3, EAN-No. 4000896199259


3/4" commercial vehicle pin wrench set for rear axle MAN and MERCEDES-BENZ

- For repair and maintenance work on the wheel hub, wheel bearing or brake disc
- For **MAN** and **MERCEDES-BENZ** 10 t and 13 t AP Hypoid and tag axle N7/4, bus 0305G, 0405G
- **MAN** hub-reduction rear axle F series H7, HD7
- Hypoid rear axle F series HY-1175, HDY-1175
- Inside \varnothing : 103 mm
- Length including guide tube (total): 140 mm
- 6 pins, width of pins: 11.5 mm
- With 2 replaceable guide tubes
- Outside \varnothing : 51.5 mm, 66.5 mm
- Length (total): 135 mm



3/4"

Made in Germany

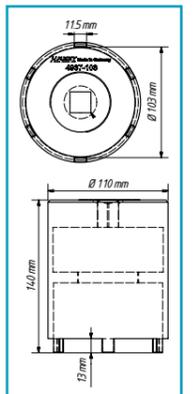

20 3/4" 3


4937-105/2, EAN-No. 4000896201938

1" commercial vehicle axle nut socket set DAF, RENAULT, Volvo

- Hexagon output: s 105 mm
- Drive: 1" (25 mm) and outside 6-point s 60 mm
- Screw-in guide tube allows for flexible application
- **DAF** with guide tube
- **RENAULT, Volvo** without guide tube
- With outside guide collar



Made in Germany



25 1" 60 2

Slotted nut




Made in Germany

4937-87/3, EAN-No. 4000896199235

3/4" commercial vehicle pin wrench set for MAN, MERCEDES-BENZ

- For repair and maintenance work on the wheel hub, wheel bearing or brake disc
- For e.g. **MAN** TGL front axle since 2000 and L 2000 **MERCEDES-BENZ** Atego rear axle HL2, 814 Vitaro
- Pin wrench for rear axle, inside \varnothing : 87 mm
- Length (total): 65 mm
- 6 pins, width of pins: 10 mm
- With 2 replaceable guide tubes
- Outside \varnothing : 49 mm, 57 mm
- Length including guide tube (total): 140 mm

20 3/4 3



3/4"


Made in Germany

4937-80, EAN-No. 4000896199006

3/4" commercial vehicle axle nut socket, 8-point, ≤ 80 mm

- For removing/installing the front axle nut with 8-point in front of the brake disc
- **SCANIA** series R, series 4, series 124–144 I – etc.
- Suitable for impact wrenches, e.g. HAZET 9013M
- Precise fit
- Parallel surfaces for perfect force fit on axle nuts
- Solid design: high (shape) stability even with very high loosening or tightening torques

20 3/4



3/4"

Made in Germany

4937

Commercial vehicle mounting sleeves

- Mounting sleeve to protect the thread on the axle during bearing disassembly and assembly
- Only lift the 40 kg bearing unit (bearing + brake disc + wheel hub) onto the mounting sleeve once, then push up to the bearing seat
- Drive via lateral rod or without additional tools is possible (ribbed handle surface)



①



②



③

Made in Germany

No.	HAZET No.	Use	Thread mm	Outside \varnothing : mm	EAN-No. 4000896+
①	4937-100	MAN TGX, TGA, TGS e.g. for MAN HY 1350 axle (13 t)	M100 x 1.5	105	201983
②	4937-7582	MAN TGL, TGM, L-Series, HL 2	M75 x 1.5	82	201969
③	4937-7578	MERCEDES-BENZ Atego, Atego 2, Tourino	M75 x 1.5	78	201990

4937

3/4" · 1" commercial vehicle hub cap socket, \varnothing 110 mm and 120 mm for flat oval BPW hub cap

- For **BPW** Eco and Eco Plus axles
- Perfect fit for **BPW** contour \varnothing 110 mm, or \varnothing 120 mm

20 3/4 25 1"



① 3/4"



② 1"

Made in Germany

No.	HAZET No.	\varnothing mm	EAN-No. 4000896+
①	4937-120	120	210459
②	4937-110	110	199273

4937

1/2" commercial vehicle centring sleeve set

- For fast assembly of centred truck drop centre rim wheels for rim hole \varnothing 26 mm
- No damage to the thread as well as exact centring of the rims thanks to conically cranked sleeves
- Length (total): 115 mm

125 1/2 3



Made in Germany

HAZET No.	For rim hole \varnothing 26 mm	EAN-No. 4000896+
4937-26/3	M22 x 1.5 e.g.: DAF, FORD, MAN, MERCEDES-BENZ, RENAULT, Volvo	199013
4937-27/3	7/8"-11G e.g. SCANIA	202010

772-2/16, EAN-No. 4000896161041

3/4" universal tool set for axle and slotted nut wrench set

- For removal and precise installation, e.g. with 6-point and 8-point nuts, slotted nuts, face nuts, round nuts with drilled holes, round nuts with pin holes, etc.
- Clamping range: 35–170 mm
- Torque (max.): 700 Nm
- 16-pieces in HAZET Safety-Insert-System soft foam insert

20 3/4 16



3/4"



197-4, EAN-No. 4000896214235

Commercial vehicle axle oil collecting pan 3 I

- Safe collection of the oil dripping from the axle when disassembling or repairing the floating axles on trucks and agricultural machinery
- Chemical-resistant, unbreakable plastic with smooth, abrasion-proof surface
- Dimensions (L x W x H): 310 x 240 x 160 mm



- Suitable for all brake callipers and wheel hubs
- Brake calliper removal and installation with just one tool
- All brake service work can be carried out without straining your back
- Compatible with all brake callipers that have European type approval



4972-1/3, EAN-No. 4000896215799

Commercial vehicle lifting aid

- Allows you to work safely, without straining your back, in tight spaces in the wheel arch on trucks, buses, trailers and trailer axles
- Significantly easier work when assembling and disassembling brake callipers and wheel hubs thanks to lifting aid
- No strain on the back
- Second person not required
- Makes screw tightening easier
- Secure hold for heavy components
- Takes the various installation situations of the brake calliper into consideration
- Secure movement with suspended components
- One-hand operation possible via spindle

Contents:

- Lifting aid
- Brake calliper holder
- Wheel hub holder



Made in Germany

Accessories

Made in Germany

No.	HAZET No.	Designation	Function	EAN-No. 4000896+
①	4972-1	Commercial vehicle brake calliper holder	Use with lifting aid 4972-3 or 4972-1/3	215423
②	4972-4	Wheel hub holder	Use with lifting aid 4972-1/3	216031

4972-2, EAN-No. 4000896215393

Swivel bearing

- For disassembly and assembly of brake calliper in trucks, buses, trailers and trailer axles that are installed in a diagonal "clockwise position between 8 o'clock and 5 o'clock"
- Connect swivel bearing to brake calliper holder and position with e.g. jacking carriage below brake calliper. This enables easy insertion of the screws even in awkward positions
- Together with brake calliper holder HAZET 4972-1




Made in Germany

4971-12, EAN-No. 4000896232857

Brake resetting tool

- Resetting WABCO brake callipers without removing the brake cylinder
- Good accessibility of the resetting device
- Easy operation with the 3-component HAZET handle
- Operation with tried and tested HAZET ratchet wrench
- Special insert in the ratchet wrench ensures safe power transmission on the resetting device
- For WABCO brake calliper in MERCEDES-BENZ Actros, Antos, Arocs
- Length (total): 454.4 mm
- Adapter s 8 mm
- Ratchet wrench 10 mm

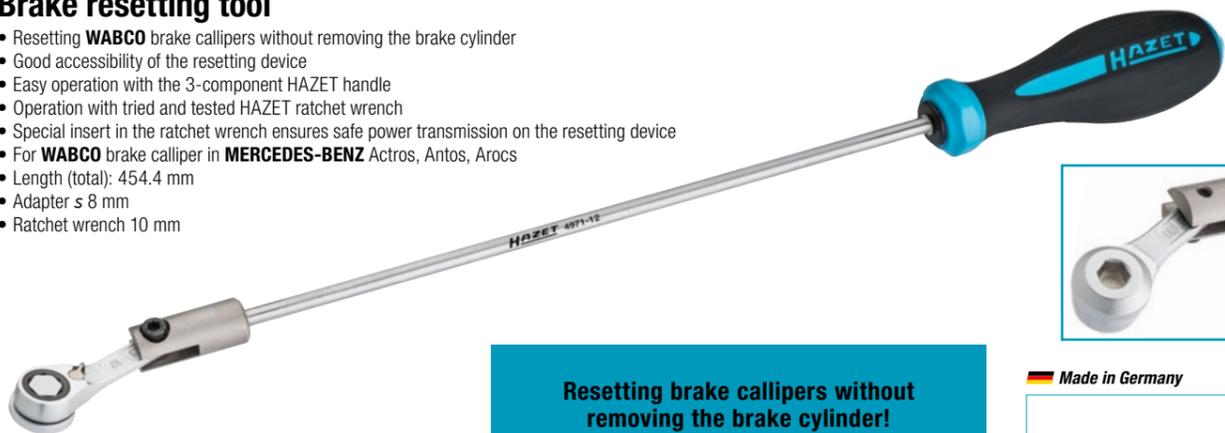


Resetting brake callipers without removing the brake cylinder!

Made in Germany

4971-11, EAN-No. 4000896218257

Brake calliper resetting tool KNORR-BREMSE

- For operating the brake calliper adjuster on trucks, buses, trailers and trailer axles using a nut-driver
- Special 11 tooth profile
- Can only be used for KNORR-BREMSE

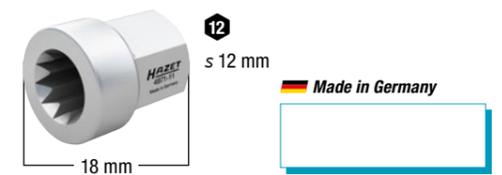

Made in Germany

2871-E

Brake calliper TORX® socket

- Operation of the brake calliper screw connection on MAN commercial vehicles
- Application: Brake calliper screws E20
- Operation e.g. with HAZET socket box-end wrench 6630D-22 in conjunction with tool holder 6397 (loosening) or torque wrench 6293-1CT or 6295-1CT (tightening)



No.	HAZET No.	For e.g.	l mm	S mm	d ₁ mm	d ₂ mm	f mm	mm	EAN-No. 4000896+
①	2871-E18	MAN TGM and TGL	39.5	E18	39.5	23.4	16.70	13.5	176175
②	2871-E20	MAN TGM · TGA	39.5	E20	39.5	25.7	18.49	15.9	148790
③	2871-E24	MAN TGA · TGS · TGX	39.5	E24	39.5	35.0	22.16	19.7	148783

4969-612, EAN-No. 4000896204281


Compressed air quick-connector releasing tool

- Easy loosening of quick-connectors with Ø 6, 8, 10, 12 mm
- For operation with open-end s 13 mm (HAZET 600 N-13), no further tools necessary
- For plug connectors DIN 74324 6 x 1.0 · 8 x 1.0 · 10 x 1.0 · 12 x 1.5 · 12 x 2.0 mm
- Enables separating contaminated tubes and plug connectors
- To be used by one person
- Time saving and therefore also cost saving
- Prevention of injuries



Made in Germany

2784-14, EAN-No. 4000896155583



3/4" brake calliper screwdriver socket

- For the operation of the brake calliper screw connections (KNORR-BREMSE) on MERCEDES-BENZ trucks e.g. Actros



Made in Germany




2872SZ



3/4" commercial vehicle box-end wrench (12-point) with 2 striking faces


- 12-point profile facilitates application even on hard-to-reach fittings
- With 20 mm (3/4") drive for torque wrenches!
- For e.g. SAF-brake calliper on MERCEDES-BENZ Atego and Actros
- Wrench with 20 mm (3/4") 4-point insertion hole for the correct tightening of screws with HAZET torque wrench in accordance with the manufacturer's specifications
- Wrench flat with laser-engraved formula for calculating the correct effective length

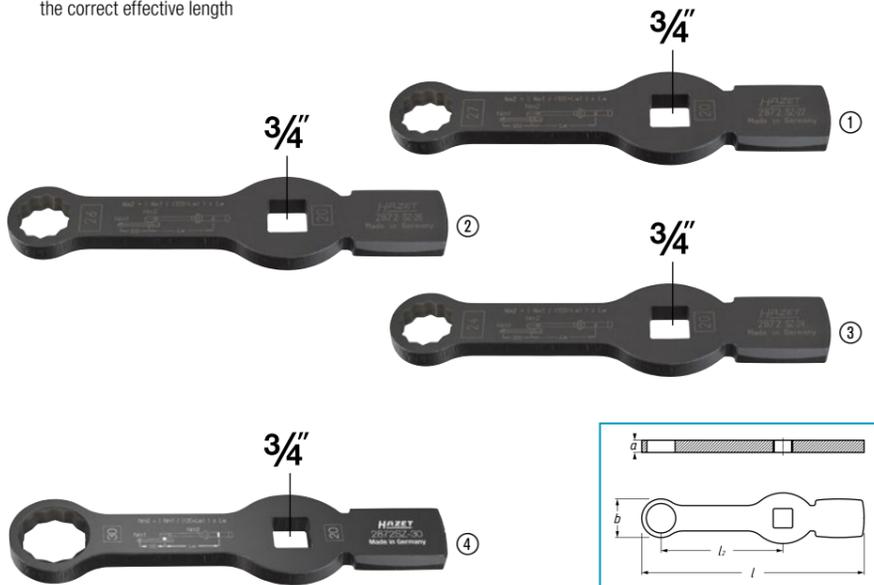

Made in Germany


No.	HAZET No.	For operation of the brake calliper screw connection on e.g.	s/mm	l/mm	l ₂ /mm	EAN-No. 4000896 +
①	2872SZ-24	SAF-brake calliper, MERCEDES-BENZ Atego and Actros	24	219.0	120	204175
②	2872SZ-26	DAF XF95/XF105/XF	26	219.0	120	203727
③	2872SZ-27	MERCEDES-BENZ Atego, Actros, KÄSSBOHRER buses	27	220.5	120	207183
④	2872SZ-30	SCANIA series 3, 4, G, P, T, R, S and bus	30	225.5	120	246281

2872-E



3/4" TORX® slogging wrench with 2 striking faces

- For loosening and tightening TORX® screws on brake calliper fittings on the front axle and trailing axles of trucks
- Wrench flat with laser-engraved formula for calculating the correct effective length!
- Use of the wrench for assembly and disassembly of the brake calliper fittings renders the disassembly of the steering tie lever unnecessary
- Correct tightening of screws with torque wrench using a 20 mm (3/4") drive in accordance with the manufacturer's specifications
- For e.g. MAN TGL TGM wrench sizes: E18, E20, E24
- 2872-E20 e.g. on Schmitz Cargobull Trailer axles
- Effective length: 120 mm
- Head width: 12 mm

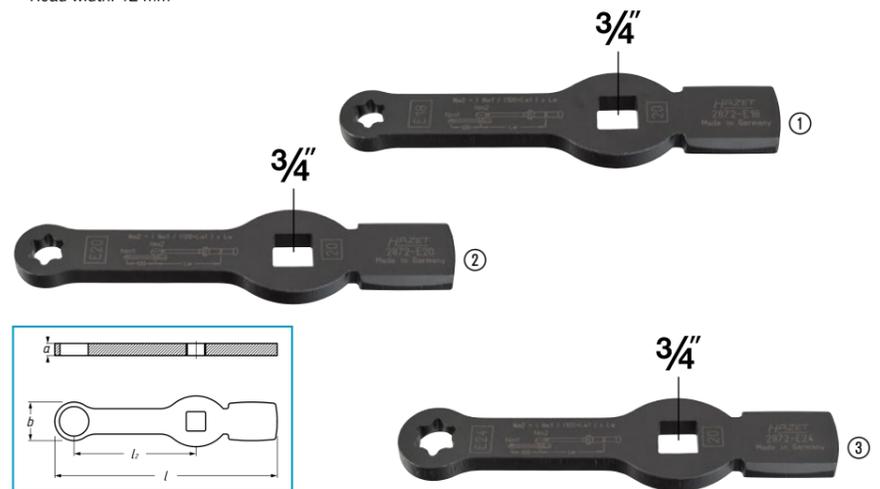

Made in Germany

No.	HAZET No.	Head width mm	l/mm	l ₂ /mm	g	EAN-No. 4000896 +	
①	2872-E18	E18	30	215	120	573	201235
②	2872-E20	E20	32	216	120	577	201242
③	2872-E24	E24	38	219	120	588	201259


2872FS-24, EAN-No. 4000896209989



1/2" commercial vehicle box-end wrench (12-point) with 2 striking faces

- No need to remove the wheel, even if brake cylinder fittings protrude far into the rim
- Use in trucks, buses, trailers and trailer axles without removing the wheel
- For loosening or tightening brake cylinder fittings
- Laser-engraved formula for rapid conversion of the tightening torque specified by the manufacturer
- 2 impact areas enable the force to be applied using a hammer
- Time saving (approx.): 20 min

Brake cylinder disassembly without removing the wheel!

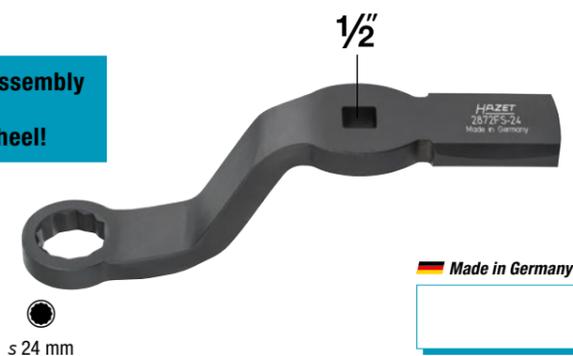


Made in Germany

4937



3/4" box-end wrench · 12-point · with 2 striking faces

- The 12-point profile allows application even in areas with hard-to-reach screw connections
- Application: Operation of usually very tight cardan shaft screw connection, even when the space available is limited
- Laser-engraved formula for rapid conversion of the tightening torque specified by the manufacturer
- Especially suitable for all repairs on the go, where no working pit is available
- 2 impact areas enable the force to be applied using a hammer
- Highly stable and extremely resilient

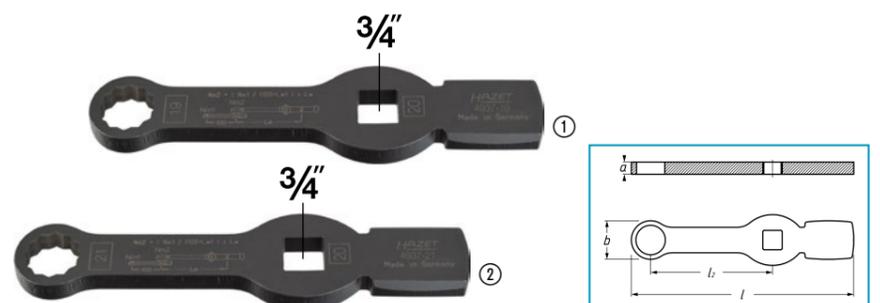

Made in Germany

No.	HAZET No.	For e.g.	l/mm	l ₂ /mm	a/mm	b/mm	EAN-No. 4000896 +
①	4937-19	MERCEDES-BENZ commercial vehicles cardan shaft screw connections	215	120	12	30	215645
②	4937-21	MAN commercial vehicles cardan shaft screw connections	215	120	12	30	215638

2152-600, EAN-No. 4000896246762

Multimeter

- For measuring voltage, resistance, frequency, capacitance and temperature
- For trade, industry, and DIYers as well as passenger car, commercial vehicle and agricultural workshops
- Easy operation thanks to clearly arranged control panel and large illuminated LCD display (all data quickly readable)
- Very short response times ensure rapid display of measurement results
- Optimal device alignment thanks to the stand on the housing
- Protective cover protects multimeter against damage from being dropped
- Temperature probe from -20° to 200°C included
- Diode test
- During the continuity test, the integrated buzzer signals continuity below 50 Ω
- Duty cycle
- AC voltage/DC voltage.: 0–600 V
- DC/AC: 0–10 A
- Frequency: 0–10 MHz
- Resistance measurement: 0 to 60 MΩ
- Automatic switch-off
- Backlight
- Data hold
- True RMS
- CAT III 600V
- Including measuring tips for clipping into the protective cover and 2 x AA batteries




4670-9/5, EAN-No. 4000896205042

5

Commercial vehicle cable release tool assortment

- **Guarantees damage-free release of the most common commercial vehicle contacts**
- Malfunctions due to loose contacts can be remedied easily, quickly and professionally
- With sliding caps protecting the blades from damage and avoiding the risk of injury
- OEM quality – "Made in Germany"

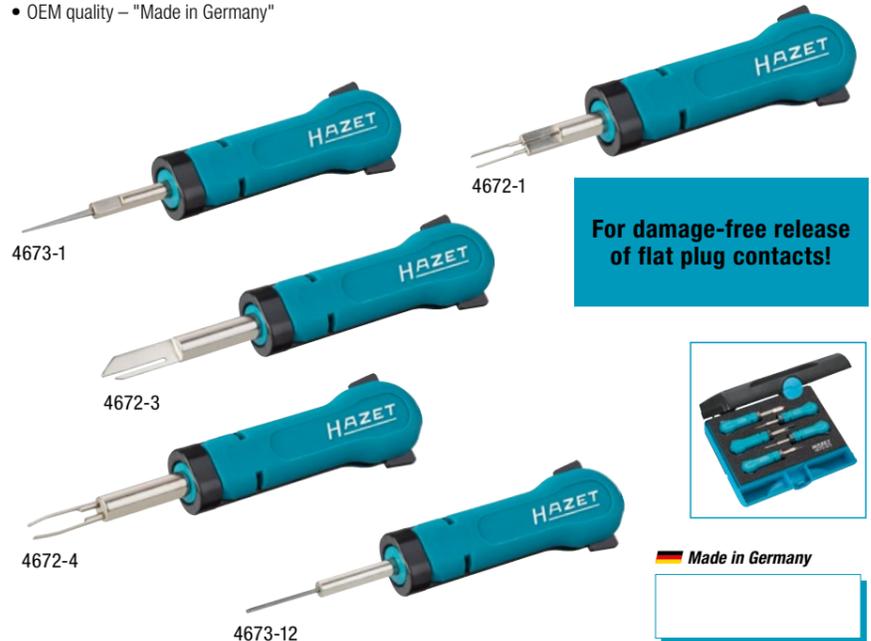

For damage-free release of flat plug contacts!



2152N/3, EAN-No. 4000896204151

3

Electronic set

- For troubleshooting on electronic components
- **Measuring range 3 – 48 V**
- Voltage display LED: 5, 12, 24, 48 V
- Polarity display: LED for positive or negative, AC voltage with illuminated LED
- Additional crocodile clip and probe tip for attaching
- Cable length: 1,300 mm
- Probe tip, needle with sliding mechanism



4650-1, EAN-No. 4000896022014

Acid tester

- **For checking the acid content of the battery fluid**
- With aerometer
- Solid plastic housing – significantly reduced risk of breakage compared to glass enclosures
- Length: 280 mm



4650-3A, EAN-No. 4000896249275

Special tool for battery plugs

- **Special length allows universal application in areas with restricted access**
- For screwing battery plugs in and out
- Profile is especially suitable for battery plugs
- Ergonomically shaped HAZET 2-component T-handle
- Surface: chrome-plated
- Screwdriver width: 14.5 mm
- Screwdriver height: 1.7 mm



4650-4, EAN-No. 4000896022038

Battery pole and terminal brush

- Cleaning the terminal posts and clamps
- Length: 120 mm
- With protective cover



4675 Unlocking tool for VAG plug connections

- Damage-free unlocking of electrical plug connections on various components and sensors
- **VAG** group plug connections, **SCANIA**, **MAN** TGE / TGX from model year 2020, e.g. injectors, rail pressure sensors, fluid level sensors, ignition coils, vacuum sensors, brake wear sensors, pressure regulators and lighting systems

Made in Germany

No.	HAZET No.	l mm	EAN-No. 4000896+
①	4675-1	130	244331
②	4675-2	191	244348



150/39, EAN-No. 4000896239641

1/2" high-voltage tool set, with protective insulation

- Universally applicable on all trucks and buses, as well as agricultural and construction machinery with electric drives
- For operation of live components such as batteries, capacitors or distributors
- The use of two extensions enables simple and safe installation and removal of e.g. the battery thanks to the special insulation of the tools
- All the relevant tools for the operation of live fittings in one set
- Highest level of safety through constant quality control of the tools
- Delivery in new HAZET L-Boxx 136 – all tools ready to hand
- For e-trucks from e.g.: **MERCEDES-BENZ, MAN, DAF, RENAULT, SCANIA** and **Volvo**
- Suitable for use with electric urban buses such as e.g. **MERCEDES-BENZ, MAN, VDL, IVECO, SOLARIS, Volvo, SCANIA, BYD, SILEO, LIKKER, COBUS, MELLOR, KARSAN, IRIZAR, EBUSCO, TEMSA, EURABUS, EASYMILE, NAVJA, LOCAL MOTORS, HEULIEZ**



916KV • 12⁵/₂ 1/2
Length: 260 mm

810VDE • 10
0,4 x 2,5 · 0,5 x 3 ·
0,6 x 3,5 · 0,8 x 4 mm

810VDE • 10
PH 1 · PH 2 · PH 3

1802VDE-22
Length: 180 mm

1805VDE-44
Length: 200 mm

1816VDE-222
Length: 160 mm

1841AVDE-22
Length: 160 mm

1860VDE-11
Length: 160 mm

917KV-5 • 12⁵/₂ 1/2 1/2
Length: 140 mm

918KV-10 • 12⁵/₂ 1/2 1/2
Length: 264 mm

630KV • 10
s 13 · 17 · 19 mm

450KV-5 • 10
s 13 · 17 · 19 mm

1804VDE-33
Length: 208 mm

900KV • 10 1/2
s 13 · 14 · 15 · 16 ·
17 · 19 mm

196V-10/5

196V-20/5

2156VDE-2



8816HPKV, EAN-No. 4000896239184

3/8" high-voltage reversible ratchet, with protective insulation

- 3/8" HiPer fine-tooth reversible ratchet – with protective insulation
- 90 teeth, small operating angle of only 4°
- Sockets are securely locked in place
- Attached tools can easily be released by pressing the button
- Increased service life thanks to the use of state-of-the-art lubricants in the ratchet mechanism
- Locking function of the lever offers protection against unwanted switching
- Ergonomic shift lever and release button
- Surface: with protective insulation
- IEC 60900
- Protective insulation up to 1,000 V
- For manual operation



NEW!

Made in Germany

You can also find other high-voltage tools at:
www.hazet.de



839-1, EAN-No. 4000896035670

Voltmeter

- 220–250 V according to standard VDE 0680
- Slotted blade, concave ground
- Extra long handle, 92 mm
- With clip
- Defective glow tube not replaceable according to VDE
- Length (total): 150 mm




Made in Germany

5108KV · 5109KV · 5121KV

3/8" or 1/2" torque wrench, with protective insulation

- Right/left release with plug-in square enables tightening at torque setting both to the right and to the left within the specified tolerance
- Can be readjusted and recalibrated
- Possible repairs for the torque wrenches in the HAZET Service Centre
- High durability
- Accuracy through the option of: Disassembly, adjustment, repair (if necessary), calibration, assembly
- Suitable for control of inspection and test equipment
- Sustainable and environmentally sound
- Fine scale graduation with vernier scale
- Locking against unintentional adjustment of the setting value
- Safe torque release: palpable (close-gap release), audible ("click" sound)
- Low weight for good handling and fatigue-free work
- DIN EN ISO 6789-2:2017, Square according to DIN 3120, ISO 1174-1, IEC 60900:2018

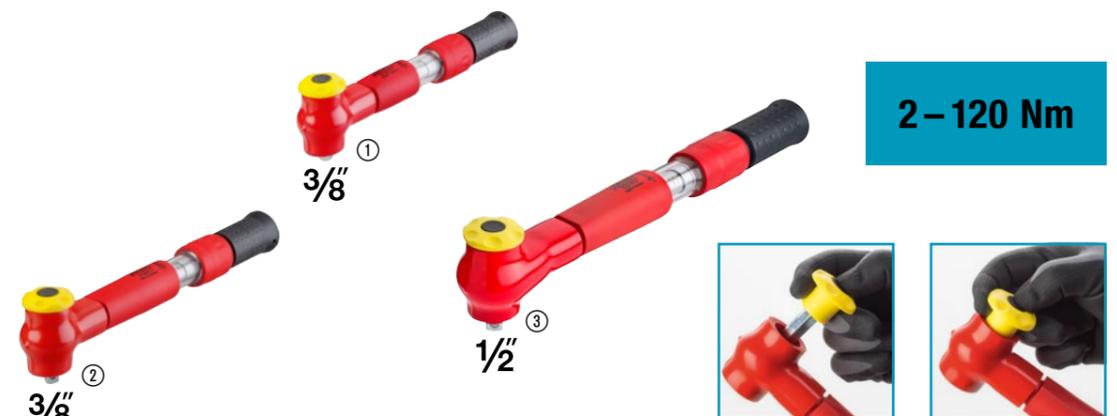

2 – 120 Nm

Made in Germany

No.	HAZET No.	■	Torque range Nm	Release accuracy tolerance %	Width mm	Length mm	EAN-No. 4000896+
①	5108KV	10 3/8	2 – 10	6	275	590	235421
②	5109KV	10 3/8	5 – 25	4	305	639	235445
③	5121KV	12 5/2 1/2	20 – 120	4	420	1470	233397

1862N, EAN-No. 4000896242627

Automatic wire stripper


- Automatic scanning system, no adjustment to the cable cross-section necessary
- Stripping of flexible cables (stranded wire) and solid conductors Ø 0.2 – 6.0 mm² or AWG 24 – 10
- Optimally positioned diagonal cutter up to 2.5 mm²
- Adjustable length stop: 6 – 15 mm
- Replaceable blades
- Not for work on or near electrically live parts



Made in Germany

1750 Quick-clamping puller

- High strength and rigidity for safe work
- Quick adjustment thanks to "one-nut" fixation per arm
- Two-arm puller
- Forged arms
- Inner and outer puller in one
- Quick and easy installation



Solid all-steel bridge!

HAZET No.	Tonnes max.	sb mm	st mm	Spindle mm	EAN-No. 4000896+
1750-34	20	345	260	M27 x 2 x 377	250042
1750-44	20	440	260	M27 x 2 x 377	250134

1750/5, EAN-No. 4000896251476

Quick-clamping puller set

- In display stands
- **5-piece set:**
 - 1750-9
 - 1750-11
 - 1750-14
 - 1750-19
 - 1750-26



4685-4, EAN-No. 4000896231126

Tubular socket wrench

- For dismantling/mounting the multi-fingers on CLAAS, LEXION, TUCANO and AVERO combine harvesters
- Multi-finger operation possible through the very narrow opening on the feed drum
- Easy to drive with introduced square by means of a 12.5 mm (1/2") ratchet (e.g. HAZET 916HP)
- Application of torques on multi-fingers possible
- With 6-point output: s 24 mm
- Dimensions / length: 330 mm
- Diameter d1 (at output): 32.3 mm
- Diameter d2 (at drive): 28 mm




Multi-finger operation through very narrow openings!

Made in Germany

1779-3, EAN-No. 4000896135998

Universal ball joint puller

- Universal application e.g. for trucks, lightweight design
- Jaw opening a: 32 mm
- Clamping range sb: 85 mm




Made in Germany

1790

Ball joint puller

- For the easy extraction of ball joint pivots and safe removal of ball joints
- **Supported by hydraulic system**
- Load (max.): 12 t




Made in Germany

HAZET No.	a mm	sb mm	EAN-No. 4000896+
1790-5	30-34	70	145461
1790-6	36-40	85	145478

1790-3, EAN-No. 4000896145454

Ball joint puller

- For extracting the ball joint pivots of steering arms, steering tie rods, stabilisers
- Jaw opening a: 40 mm
- Clamping range sb: 85 mm



Made in Germany

1779-55, EAN-No. 4000896136407

Ball joint puller

- For removing the ball joint pivots on steering tie rods, stabilizers, etc.
- Jaw opening: 55 mm
- Clamping depth: 80 mm
- Width: 77 mm





Made in Germany

1780

Removal and assembly fork

- Proven and economical system
- Application: Fast operation of push rod and steering tie rod ends, pitman arms and other parts of the steering thanks to wedge-shaped fork
- Easy to handle
- Shock absorber removal and other separation work
- Application possible in confined spaces
- Robust forged design

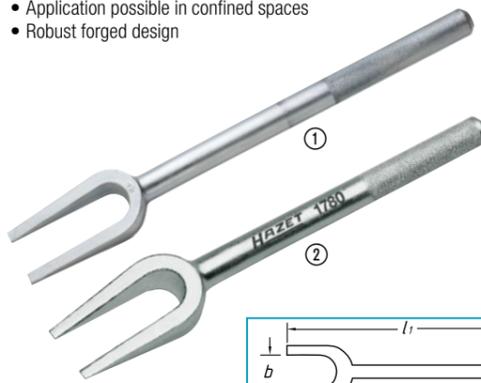

Made in Germany

No.	HAZET No.	l1 mm	l2 mm	b mm	EAN-No. 4000896+
①	1780-23	340	80	23	133352
②	1780-29	350	80	29	133376



4685

Taper key extractor

- Safe removal of taper keys from gear wheels on agricultural machinery



Made in Germany

No.	HAZET No.	Design	EAN-No. 4000896+
①	4685-1	Straight, 420 mm	222889
②	4685-2	Curved, 366 mm	222896



Tool with suitable profile for quick coupler



Attaching the tool



Secure hold thanks to integrated magnets



Operating using ratchet with inserted 1/2" (12.5 mm) 4-point socket

4685-3, EAN-No. 4000896230730

CLAAS operating tool

- For manual operation of attachments for CLAAS JAGUAR, e.g. ORBIS, PICK UP, DIRECT DISC and CORIO CONSPEED
- 3 magnets ensure secure hold on the quick coupler
- Precise positioning of the tool on the quick coupler
- Saves on second worker by turning alone using 1/2" (12.5 mm) ratchet (e.g. HAZET 916HP)
- Simple turning of the attachment possible
- Safe tool actuation outside the danger zone
- Light aluminium tool
- Especially adapted to requirements in field use

12.5 1/2"



Made in Germany



Facilitates work on the CLAAS maize header!

2132 · 2133 · 2134 · 2135
Splitting tools




No.	HAZET No.	Designation	Cutting width mm	Handle length mm	g	EAN-No. 4000896+
①	2135-3000	Sledgehammer	75	900	3,000	231157
②	2132-600	Hand axe	105	360	600	231140
③	2133-1250	Wood axe	132	700	1,250	231133
④	2134-1250	Riving axe	92	500	1,250	229529
⑤	2132-3	Pickaroon	-	400	550	244607



2132-1, EAN-No. 4000896244805

Aluminium felling wedge · straight

- Conical design makes for easy cutting into wood as well as simple felling and targeted work on trees
- High handling comfort thanks to light weight of only 550 g



2132-2, EAN-No. 4000896244799

Aluminium splitting wedge · rotated

- The rotated, conical shape of the splitting wedge allows for easy, targeted penetration into wood and log splitting
- High handling comfort thanks to light weight of only 800 g




179NXXL-8D/619, EAN-No. 4000896245185

Tool trolley *Assistant* with 616 expert tools, lateral door and multiple socket strip


- More drawer space for tools due to greater drawer depth!
- Much larger storage and work areas made from stainless steel!
- 7 flat drawers (81 x 870 x 522 mm) and one high drawer (166 x 870 x 522 mm)
- 100% drawer slide-out with ball-bearing telescopic slides
- Loading capacity per drawer: 40 kg

Extra deep! Extra wide! Contains more!

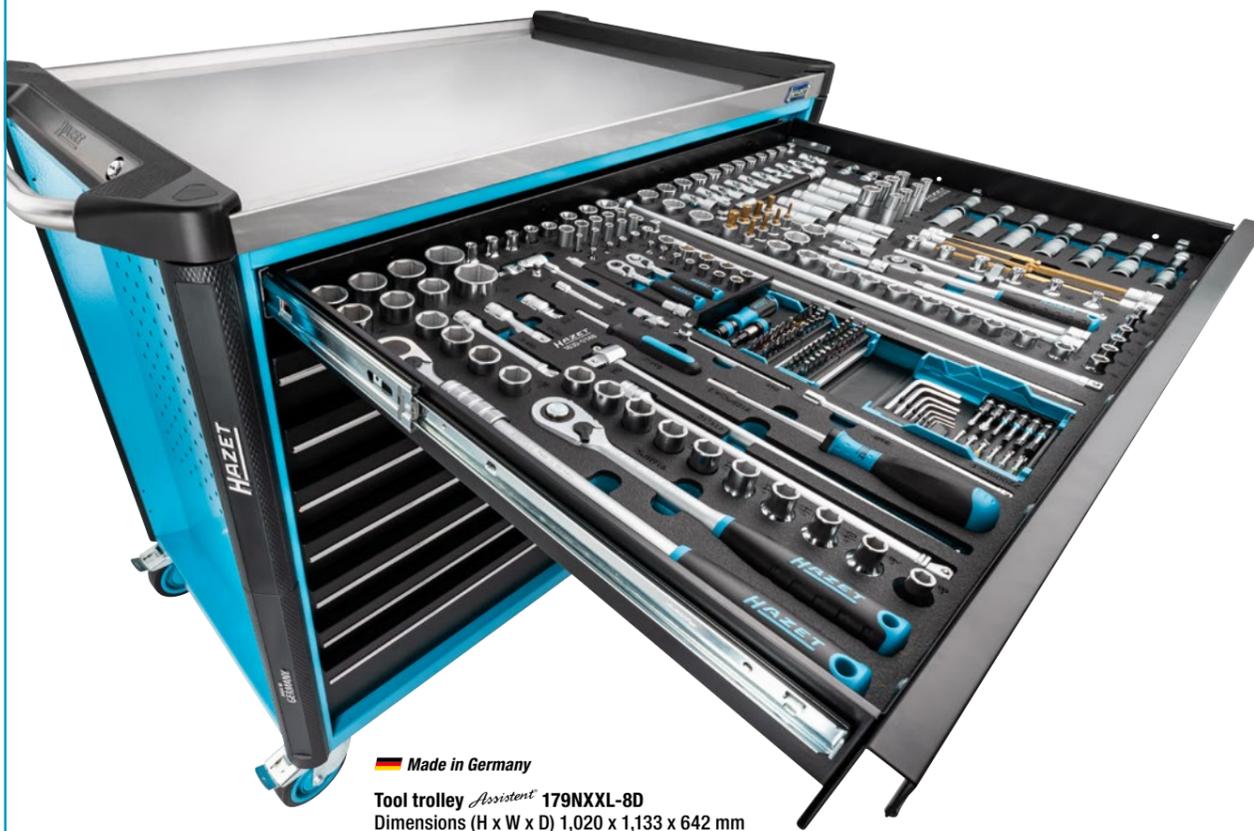


Made in Germany

Tool trolley *Assistant* 179NXXL-8D
Dimensions (H x W x D) 1,020 x 1,133 x 642 mm

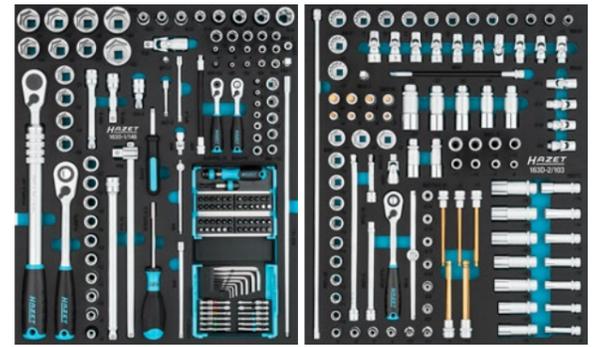


163D-1/148

163D-2/103

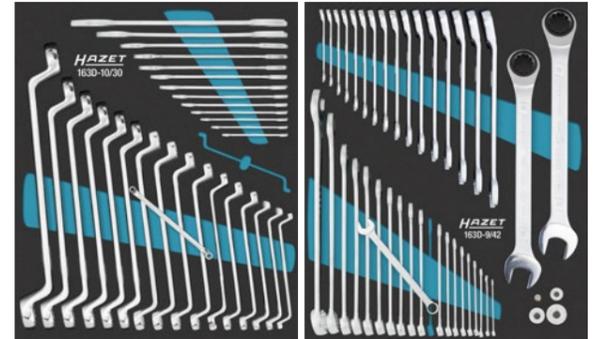

163D-10/30

163D-9/42

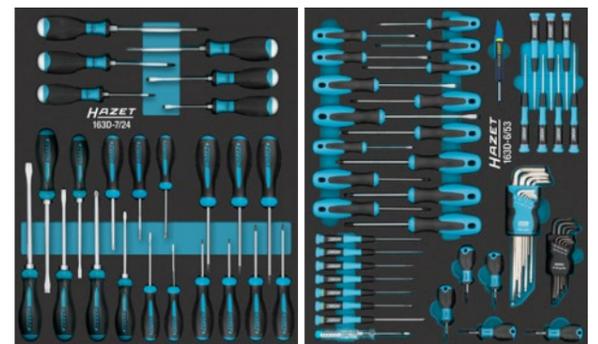

163D-5/24

163D-6/53




163D-5/24

163D-12/30



163D-11/11

163D-8/13

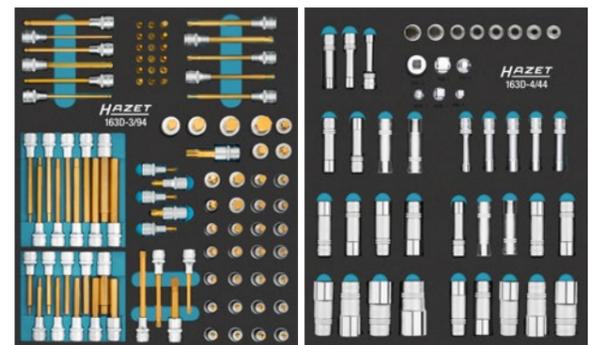


163D-3/94

163D-4/44




Made in Germany

Made in Germany
 Tool trolley *Assistant* 179NXXL-8D
 Dimensions (H x W x D) 1,020 x 1,133 x 642 mm
 Incl. lateral door HAZET 179N-21D and multiple socket strip HAZET 161N-5D

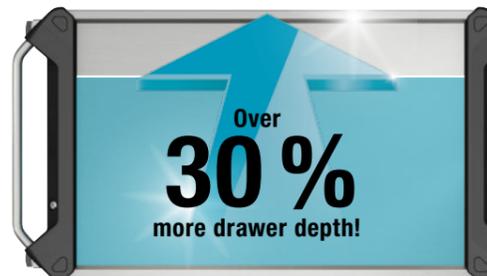

Drawer depth comparison: 179NXXL-8D (522 mm) with 179N series (398 mm)



Your HAZET specialist dealer



NKW24/EN/XX/0/1. 03.24/1. CHS/MD

4